


PAGE	285	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0

SPECIFICATIONS
 Current Rating: 2A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25℃ ~ +85℃
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0
 Color: Natural(White)

PART NO.	Dimensions	
	A	B
2001S-02TW-L	2.00	6.00
2001S-03TW-L	4.00	8.00
2001S-04TW-L	6.00	10.00
2001S-05TW-L	8.00	12.00
2001S-06TW-L	10.00	14.00
2001S-07TW-L	12.00	16.00
2001S-08TW-L	14.00	18.00
2001S-09TW-L	16.00	20.00
2001S-10TW-L	18.00	22.00
2001S-11TW-L	20.00	24.00
2001S-12TW-L	22.00	26.00
2001S-13TW-L	24.00	28.00
2001S-14TW-L	26.00	30.00
2001S-15TW-L	28.00	32.00
2001S-16TW-L	30.00	34.00
2001S-17TW-L	32.00	36.00
2001S-18TW-L	34.00	38.00

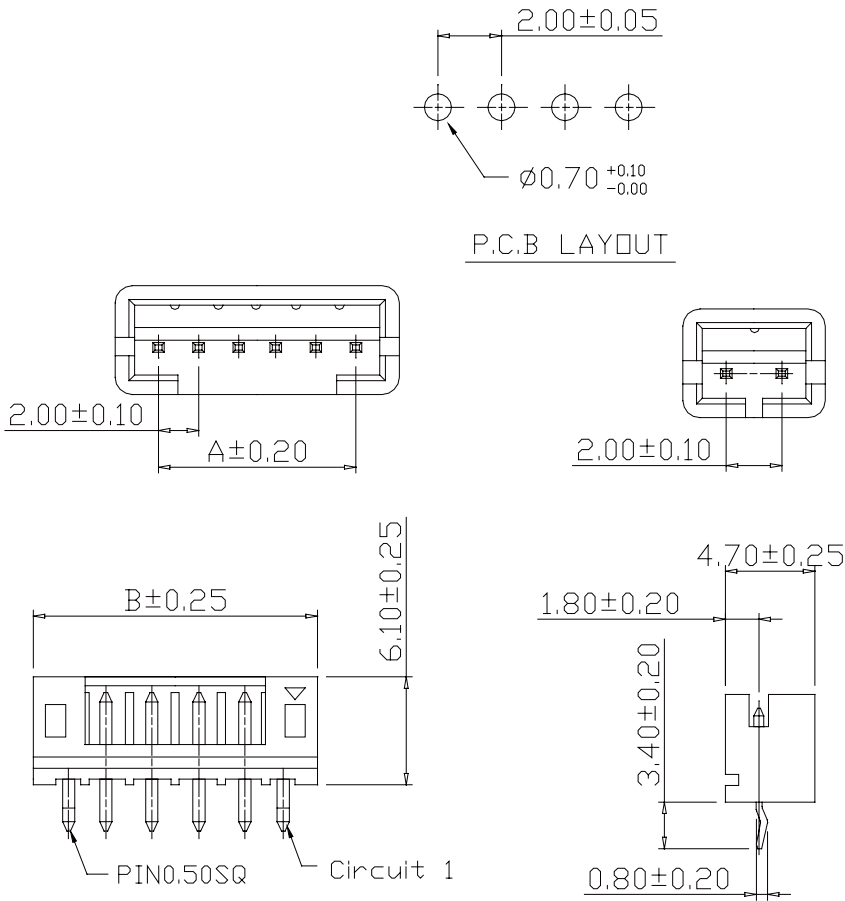

PartNo.:2001S-XXTW -L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2001S-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel:0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	