
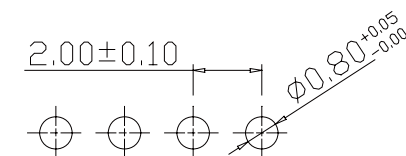
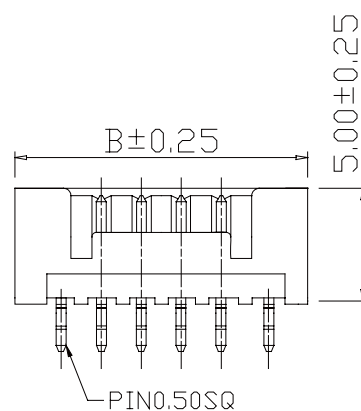



SPECIFICATIONS

Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 650V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 6T, UL94V-0
 Color: Natural(Black)

PART NO.	Dimensions	
	A	B
2003S-02TB-L	2.00	6.00
2003S-03TB-L	4.00	8.00
2003S-04TB-L	6.00	10.00
2003S-05TB-L	8.00	12.00
2003S-06TB-L	10.00	14.00
2003S-07TB-L	12.00	16.00
2003S-08TB-L	14.00	18.00
2003S-09TB-L	16.00	20.00
2003S-10TB-L	18.00	22.00
2003S-11TB-L	20.00	24.00
2003S-12TB-L	22.00	26.00
2003S-13TB-L	24.00	28.00
2003S-14TB-L	26.00	30.00
2003S-15TB-L	28.00	32.00

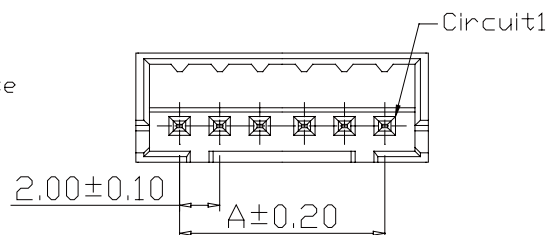

P.C.B LAYOUT

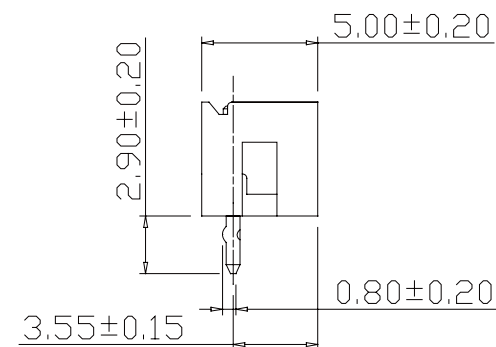

PartNo.: 2003S-XXTB-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2003S-XXTB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com								