
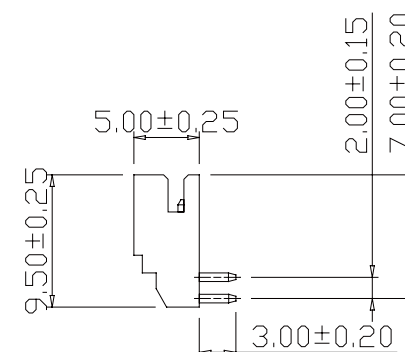



PAGE	291	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0

SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0
Pantone Color: 7528C

PART NO.	Dimensions	
	A	B
2004R-202TW-L	2.00	6.00
2004R-203TW-L	4.00	8.00
2004R-204TW-L	6.00	10.00
2004R-205TW-L	8.00	12.00
2004R-206TW-L	10.00	14.00
2004R-207TW-L	12.00	16.00
2004R-208TW-L	14.00	18.00
2004R-209TW-L	16.00	20.00
2004R-210TW-L	18.00	22.00
2004R-211TW-L	20.00	24.00
2004R-212TW-L	22.00	26.00
2004R-213TW-L	24.00	28.00
2004R-214TW-L	26.00	30.00
2004R-215TW-L	28.00	32.00
2004R-216TW-L	30.00	34.00
2004R-217TW-L	32.00	36.00
2004R-218TW-L	34.00	38.00
2004R-219TW-L	36.00	40.00
2004R-220TW-L	38.00	42.00

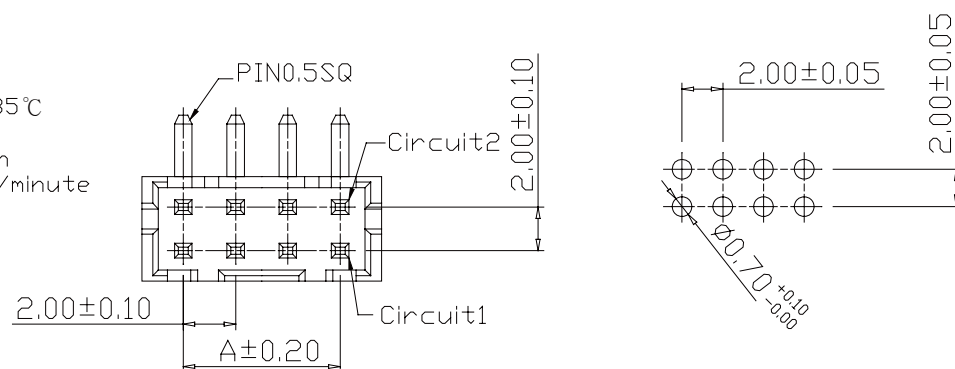

PartNo.: 2004R-2XXTW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2004R-2XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	