


PAGE	293	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0

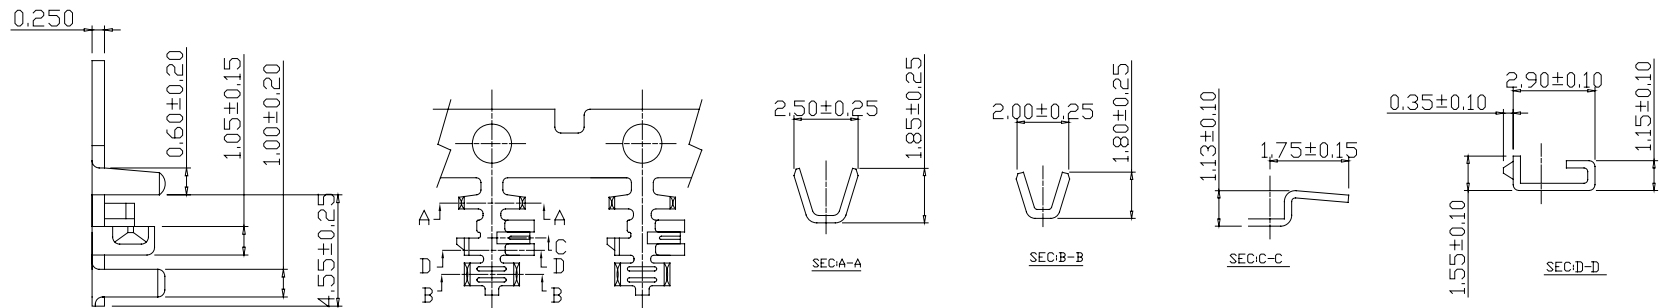


Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#22-#30	1.45mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

Part No.: 2006-T-L

SPECIFICATIONS
 Current Rating: 2A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66, UL94V-0
 Color: Natural(White)

PART NO.	Dimensions		
	A	B	C
2006H-02W-L	2.00	6.00	4.80
2006H-03W-L	4.00	8.00	6.80
2006H-04W-L	6.00	10.00	8.80
2006H-05W-L	8.00	12.00	10.80
2006H-06W-L	10.00	14.00	12.80
2006H-07W-L	12.00	16.00	14.80
2006H-08W-L	14.00	18.00	16.80
2006H-09W-L	16.00	20.00	18.80
2006H-10W-L	18.00	22.00	20.80
2006H-11W-L	20.00	24.00	22.80
2006H-12W-L	22.00	26.00	24.80
2006H-13W-L	24.00	28.00	26.80
2006H-14W-L	26.00	30.00	28.80
2006H-15W-L	28.00	32.00	30.80

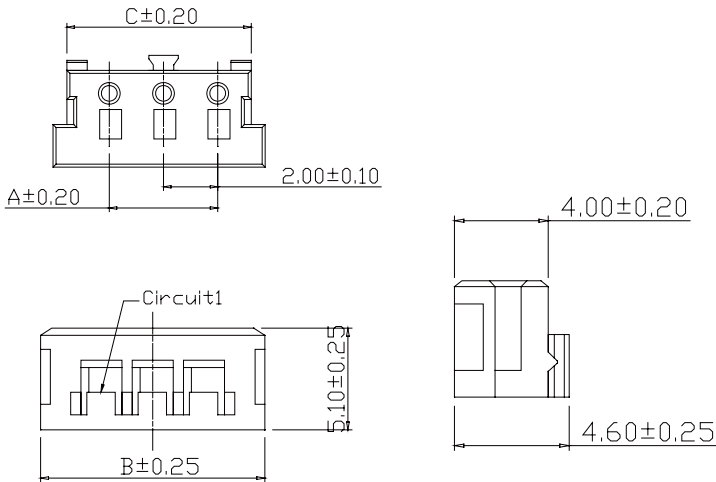

PartNo.: 2006H-XXW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2006H-XXW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
				Tel: 0769 22020068 Fax: 0769 22020069			E-mail: sales@vigortec.com	