
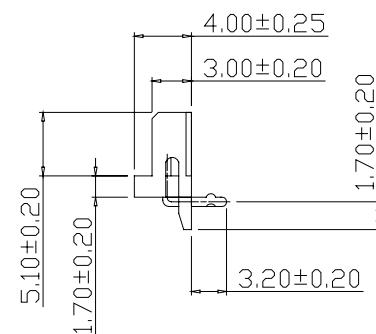

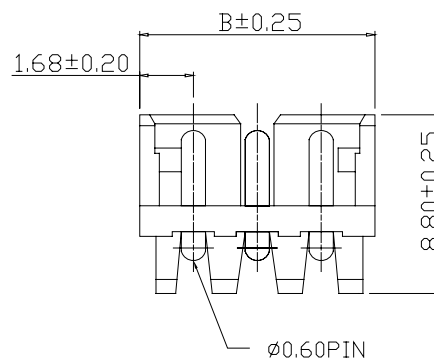


SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin-plated 100~150μ"
Material: Nylon 66, UL94V-0
Color: Natural(White)

PART NO.	Dimensions	
	A	B
2006R-02TW-L	2.00	5.96
2006R-03TW-L	4.00	7.96
2006R-04TW-L	6.00	9.96
2006R-05TW-L	8.00	11.96
2006R-06TW-L	10.00	13.96
2006R-07TW-L	12.00	15.96
2006R-08TW-L	14.00	17.96
2006R-09TW-L	16.00	19.96
2006R-10TW-L	18.00	21.96
2006R-11TW-L	20.00	23.96
2006R-12TW-L	22.00	25.96
2006R-13TW-L	24.00	27.96
2006R-14TW-L	26.00	29.96
2006R-15TW-L	28.00	31.96

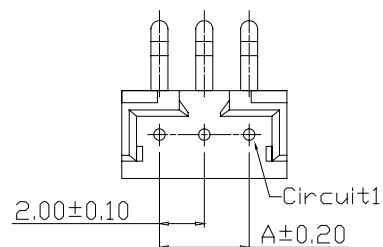

Part No.: 2006R-XXTW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.: 2006R-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	