

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Contact Resistance: $20\text{m}\Omega$ MaxInsulation Resistance: $1000\text{m}\Omega$ Min





Withstanding Voltage: 800V AC/minute

Pin Material: Phosphor Bronze/Tin-plated

Material: Nylon 66, UL94V-0

Pantone Color: 4685C

PART NO.	Dimensions	
	A	B
2002S-02TW-L	2.00	6.00
2002S-03TW-L	4.00	8.00
2002S-04TW-L	6.00	10.00
2002S-05TW-L	8.00	12.00
2002S-06TW-L	10.00	14.00
2002S-07TW-L	12.00	16.00
2002S-08TW-L	14.00	18.00
2002S-09TW-L	16.00	20.00
2002S-10TW-L	18.00	22.00
2002S-11TW-L	20.00	24.00
2002S-12TW-L	22.00	26.00
2002S-13TW-L	24.00	28.00
2002S-14TW-L	26.00	30.00
2002S-15TW-L	28.00	32.00

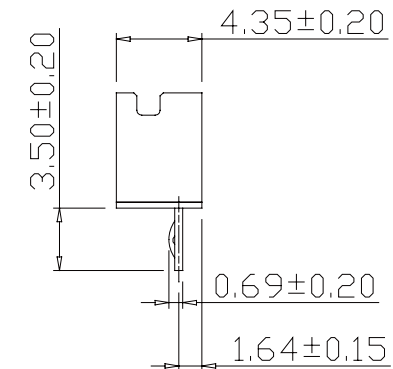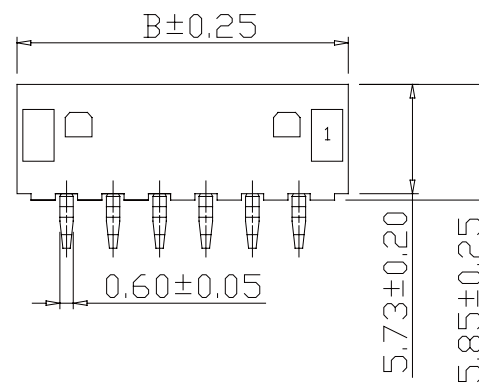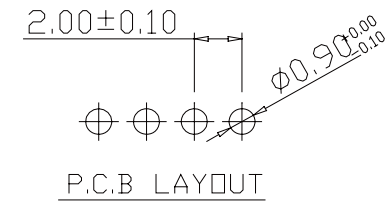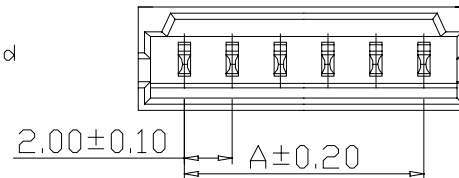

PartNo.: 2002S-XXTW -L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2002S-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel:0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	