

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Contact Resistance: 10m Ω MaxInsulation Resistance: 1000m Ω Min





Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin-plated 100~150 μ "

Material: Nylon 66, UL94V-0

Color: Natural(White)

PART NO.	Dimensions	
	A	B
2006R-02TW-L	2.00	5.96
2006R-03TW-L	4.00	7.96
2006R-04TW-L	6.00	9.96
2006R-05TW-L	8.00	11.96
2006R-06TW-L	10.00	13.96
2006R-07TW-L	12.00	15.96
2006R-08TW-L	14.00	17.96
2006R-09TW-L	16.00	19.96
2006R-10TW-L	18.00	21.96
2006R-11TW-L	20.00	23.96
2006R-12TW-L	22.00	25.96
2006R-13TW-L	24.00	27.96
2006R-14TW-L	26.00	29.96
2006R-15TW-L	28.00	31.96

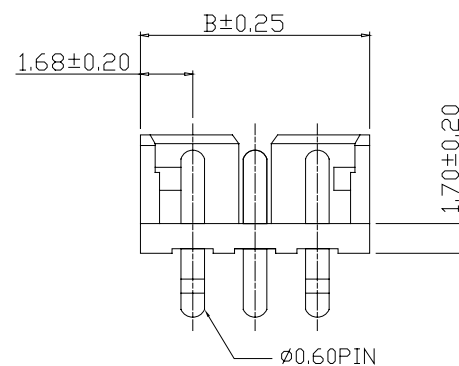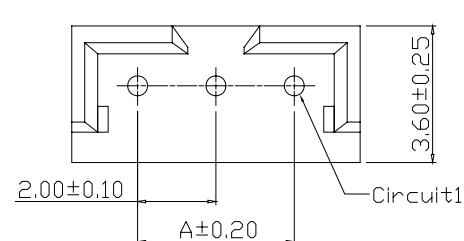

PartNo.: 2006R-XXTW-L

APPRO

CHECK

DRAWN

PART NO.

Part No.:2006S-XXTW-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel:0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com