


PAGE	295	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0

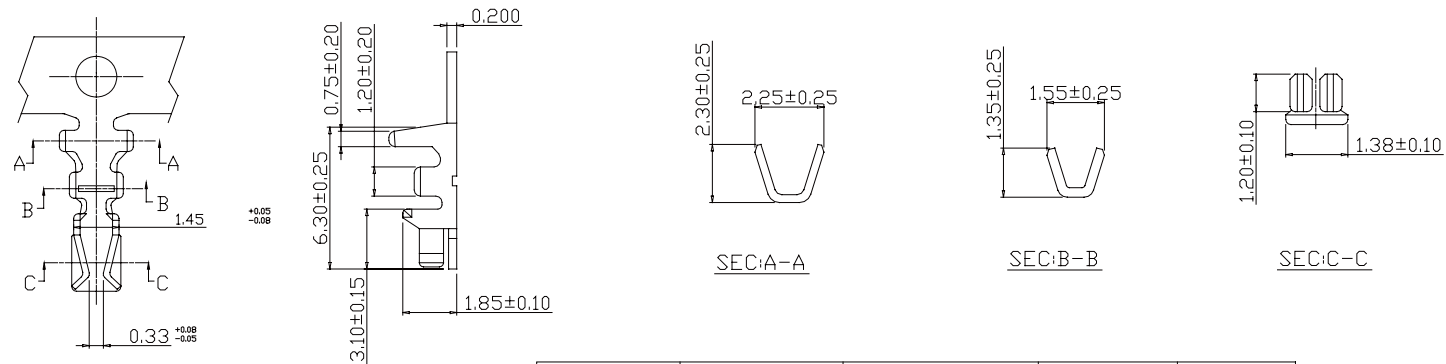


Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#22-#30	1.45mm(max)	Phosphor Brass	Tin-plated	10,000pcs


PartNo.:2211-T-L

SPECIFICATIONS
Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25℃ ~ +85℃
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66, UL94V-0
Color: Natural(White)

PART NO.	Dimensions	
	A	B
2008H-02W-L	2.00	4.60
2008H-03W-L	4.00	6.60
2008H-04W-L	6.00	8.60
2008H-05W-L	8.00	10.60
2008H-06W-L	10.00	12.60
2008H-07W-L	12.00	14.60
2008H-08W-L	14.00	16.60
2008H-09W-L	16.00	18.60
2008H-10W-L	18.00	20.60
2008H-11W-L	20.00	22.60
2008H-12W-L	22.00	24.60
2008H-13W-L	24.00	26.60
2008H-14W-L	26.00	28.60
2008H-15W-L	28.00	30.60
2008H-16W-L	30.00	32.60

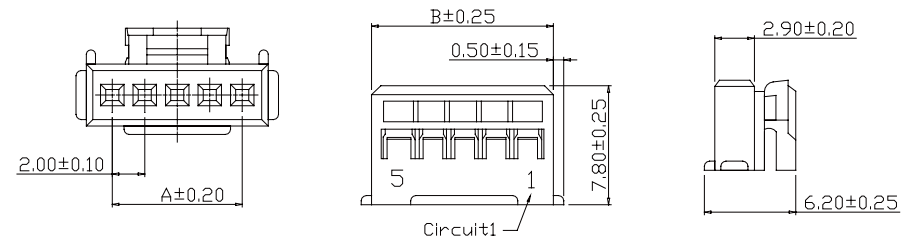

PartNo.: 2008H-XXW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2008H-XXW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	