



BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0



SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 46, UL94V-0
Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
2008R-02TW-U	2.00	6.00
2008R-03TW-U	4.00	8.00
2008R-04TW-U	6.00	10.00
2008R-05TW-U	8.00	12.00
2008R-06TW-U	10.00	14.00
2008R-07TW-U	12.00	16.00
2008R-08TW-U	14.00	18.00
2008R-09TW-U	16.00	20.00
2008R-10TW-U	18.00	22.00
2008R-11TW-U	20.00	24.00
2008R-12TW-U	22.00	26.00
2008R-13TW-U	24.00	28.00
2008R-14TW-U	26.00	30.00
2008R-15TW-U	28.00	32.00
2008R-16TW-U	30.00	34.00

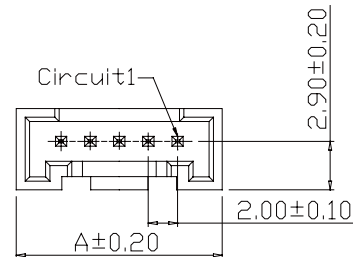

P.C.B LAYOUT



PartNo.: 2008S-XXTW-U

APPRO	CHECK	DRAWN	PART NO.	Part No.:2008S-XXTW-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER	NO.	Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com			