






PAGE	297	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0



SEC:A-A



SEC:B-B






SEC:C-C

Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#22-#30	1.45mm(max)	Phosphor Brass	Tin-plated	10,000pcs

PartNo.: 2211-T-L

SPECIFICATIONS
Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 800V AC/minute
Material: Nylon 66, UL94V-0
Color: Black

PART NO.	Dimensions	
	A	B
2211H-202B-L	2.00	6.00
2211H-203B-L	4.00	8.00
2211H-204B-L	6.00	10.00
2211H-205B-L	8.00	12.00
2211H-206B-L	10.00	14.00
2211H-207B-L	12.00	16.00
2211H-208B-L	14.00	18.00
2211H-209B-L	16.00	20.00
2211H-210B-L	18.00	22.00
2211H-211B-L	20.00	24.00
2211H-212B-L	22.00	26.00
2211H-213B-L	24.00	28.00
2211H-214B-L	26.00	30.00
2211H-215B-L	28.00	32.00
2211H-216B-L	30.00	34.00
2211H-217B-L	32.00	36.00
2211H-218B-L	34.00	38.00
2211H-219B-L	36.00	40.00
2211H-220B-L	38.00	42.00

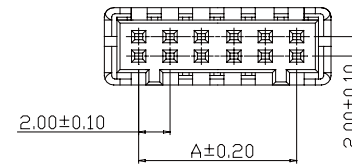

PartNo.: 2211H-2XXB-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2211H-2XXB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	