

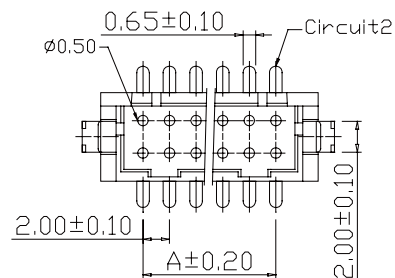
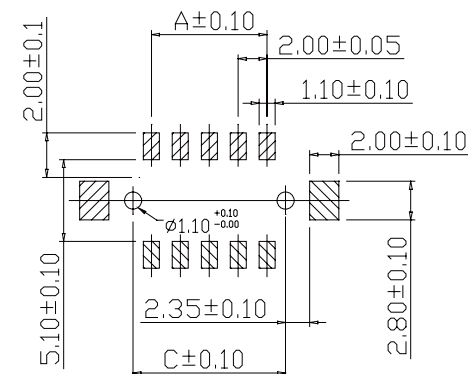


SPECIFICATIONS

Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: $30\text{m}\Omega$ Max
 Insulation Resistance: $1000\text{m}\Omega$ Min
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Gold-flash
 Material: Nylon 6T, UL94V-0
 Cap: Nylon 6T, UL94V-0, Natural(Beige)
 Color: Natural(Beige)



PART NO.	Dimensions		
	A	B	C
2211MS-202TW-U	2.00	8.50	4.00
2211MS-203TW-U	4.00	10.50	6.00
2211MS-204TW-U	6.00	12.50	8.00
2211MS-205TW-U	8.00	14.50	10.00
2211MS-206TW-U	10.00	16.50	12.00
2211MS-207TW-U	12.00	18.50	14.00
2211MS-208TW-U	14.00	20.50	16.00
2211MS-209TW-U	16.00	22.50	18.00
2211MS-210TW-U	18.00	24.50	20.00
2211MS-211TW-U	20.00	26.50	22.00
2211MS-212TW-U	22.00	28.50	24.00
2211MS-213TW-U	24.00	30.50	26.00
2211MS-214TW-U	26.00	32.50	28.00
2211MS-215TW-U	28.00	34.50	30.00
2211MS-216TW-U	30.00	36.50	32.00
2211MS-220TW-U	38.00	44.50	40.00



P.C.B LAYOUT

PartNo.: 2211M S-2X X TW -U

APPRO	CHECK	DRAWN	PART NO.	Part No.:2211MS-2XXTW-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
						Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		