



PAGE	298	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1 0



SPECIFICATIONS

Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: $30\text{m}\Omega$ Max
 Insulation Resistance: $1000\text{m}\Omega$ Min
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0
 Color: Black

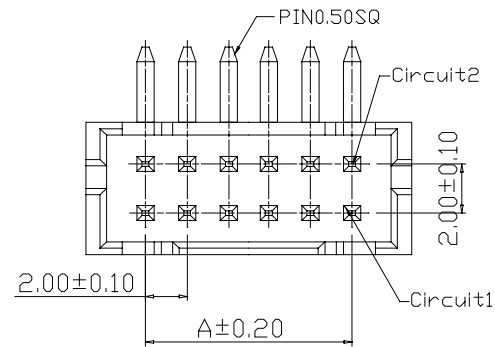

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
2211R-202TB-L	2.00	6.00	2211R-212TB-L	22.00	26.00
2211R-203TB-L	4.00	8.00	2211R-213TB-L	24.00	28.00
2211R-204TB-L	6.00	10.00	2211R-214TB-L	26.00	30.00
2211R-205TB-L	8.00	12.00	2211R-215TB-L	28.00	32.00
2211R-206TB-L	10.00	14.00	2211R-216TB-L	30.00	34.00
2211R-207TB-L	12.00	16.00	2211R-217TB-L	32.00	36.00
2211R-208TB-L	14.00	18.00	2211R-218TB-L	34.00	38.00
2211R-209TB-L	16.00	20.00	2211R-219TB-L	36.00	40.00
2211R-210TB-L	18.00	22.00	2211R-220TB-L	38.00	42.00
2211R-211TB-L	20.00	24.00			

PartNo.: 2211R-2X X TB-L



APPRO	CHECK	DRAWN	PART NO.	Part No.:2211R-2XXTB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	