

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Contact Resistance: 30m Ω MaxInsulation Resistance: 1000m Ω Min





Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66, UL94V-0

Color: Black

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
2211S-202TB-L	2.00	6.00	2211S-212TB-L	22.00	26.00
2211S-203TB-L	4.00	8.00	2211S-213TB-L	24.00	28.00
2211S-204TB-L	6.00	10.00	2211S-214TB-L	26.00	30.00
2211S-205TB-L	8.00	12.00	2211S-215TB-L	28.00	32.00
2211S-206TB-L	10.00	14.00	2211S-216TB-L	30.00	34.00
2211S-207TB-L	12.00	16.00	2211S-217TB-L	32.00	36.00
2211S-208TB-L	14.00	18.00	2211S-218TB-L	34.00	38.00
2211S-209TB-L	16.00	20.00	2211S-219TB-L	36.00	40.00
2211S-210TB-L	18.00	22.00	2211S-220TB-L	38.00	42.00
2211S-211TB-L	20.00	24.00			

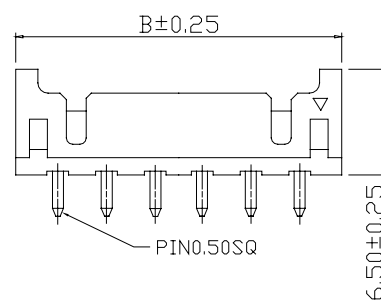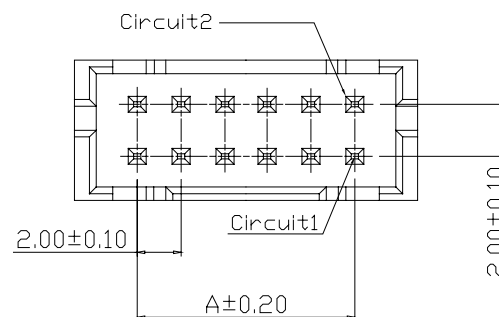

Part No.: 2211S-2XXTB-L

APPRO	CHECK	DRAWN	PART NO.	Part No.: 2211S-2XXTB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	