
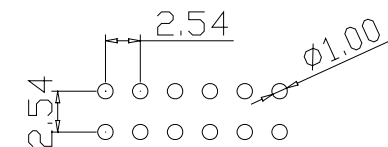
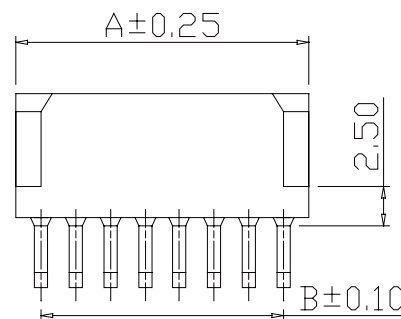



SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0
 Pantone Color: Black


PART NO.	Dimensions	
	A	B
2217R-102TB-L	5.08	2.54
2217R-103TB-L	7.62	5.08
2217R-104TB-L	10.16	7.62
2217R-105TB-L	12.70	10.16
2217R-106TB-L	15.24	12.70
2217R-107TB-L	17.78	15.24
2217R-108TB-L	20.32	17.78
2217R-109TB-L	22.86	20.32
2217R-110TB-L	25.40	22.86
2217R-111TB-L	27.94	25.40
2217R-112TB-L	30.48	27.94
2217R-113TB-L	33.02	30.48
2217R-114TB-L	35.56	33.02
2217R-115TB-L	38.10	35.56
2217R-116TB-L	40.64	38.10
2217R-117TB-L	43.18	40.64
2217R-118TB-L	45.72	43.18
2217R-119TB-L	48.26	45.72
2217R-120TB-L	50.80	48.26

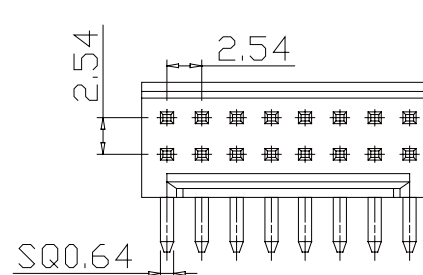

Recommended PCB Layout
 (PCB TOLERANCE±0.05)

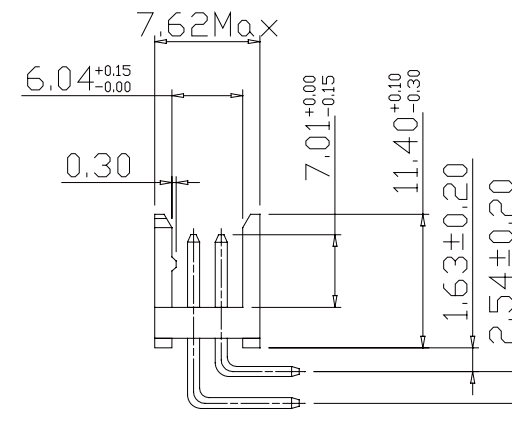

Part No.: 2217R-2X X TB-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2217R-2XXTB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com								