
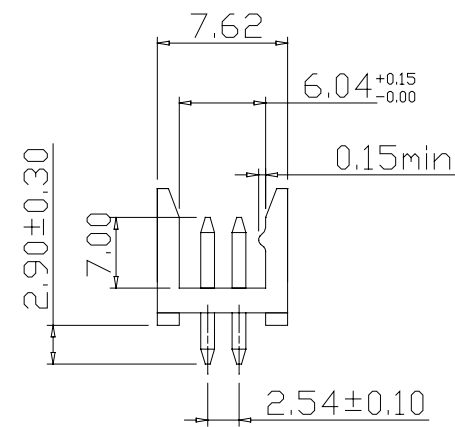


PAGE	322	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,5	1.0

SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25℃ ~ +105℃
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0
 Pantone Color: Black

PART NO.	Dimensions	
	A	B
2217S-202TB-L	5.08	2.54
2217S-203TB-L	7.62	5.08
2217S-204TB-L	10.16	7.62
2217S-205TB-L	12.70	10.16
2217S-206TB-L	15.24	12.70
2217S-207TB-L	17.78	15.24
2217S-208TB-L	20.32	17.78
2217S-209TB-L	22.86	20.32
2217S-210TB-L	25.40	22.86
2217S-211TB-L	27.94	25.40
2217S-212TB-L	30.48	27.94
2217S-213TB-L	33.02	30.48
2217S-214TB-L	35.56	33.02
2217S-215TB-L	38.10	35.56
2217S-216TB-L	40.64	38.10
2217S-217TB-L	43.18	40.64
2217S-218TB-L	45.72	43.18
2217S-219TB-L	48.26	45.72
2217S-220TB-L	50.80	48.26

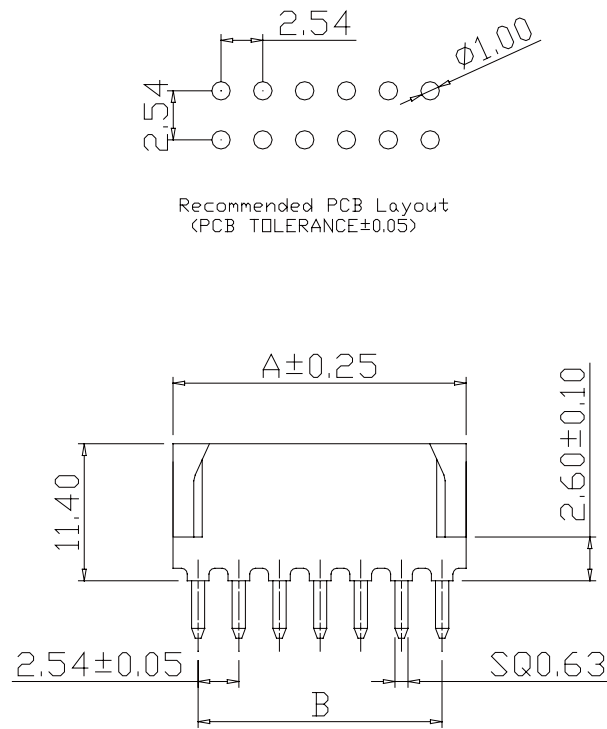

PartNo.: 2217S-2X X TB-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2217S-2XXTB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
				Tel: 0769 22020068 Fax: 0769 22020069			E-mail: sales@vigortec.com	