
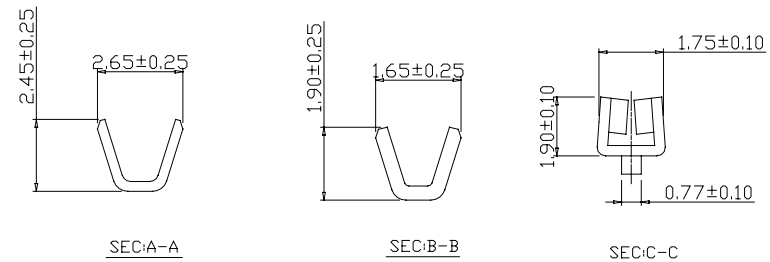


BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0

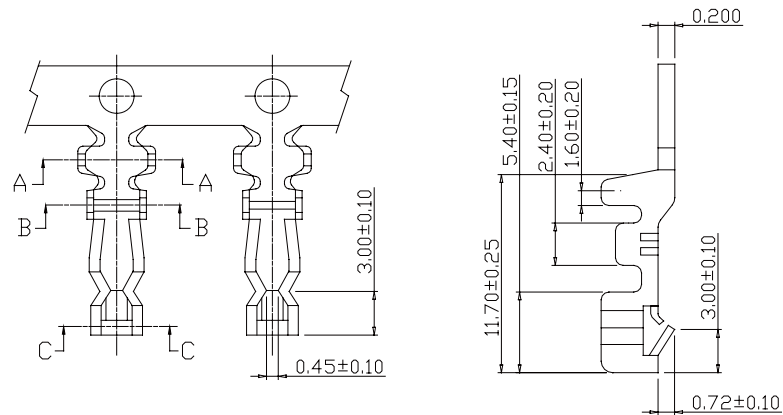


Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#20-#26	1.90mm(max)	Brass	Tin-plated	10,000pcs

PartNo.:2500-T-L

SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 500mΩ Min
 Withstanding Voltage: 800V AC/minute
 Material: Nylon 66, UL94V-0
 Color: Natural(White)

PART NO.	Dimensions		
	A	B	C
2500-02W-L	2.50	7.25	5.90
2500-03W-L	5.00	9.75	8.40
2500-04W-L	7.50	12.25	10.90
2500-05W-L	10.00	14.75	13.40
2500-06W-L	12.50	17.25	15.90
2500-07W-L	15.00	19.75	18.40
2500-08W-L	17.50	22.25	20.90
2500-09W-L	20.00	24.75	23.40
2500-10W-L	22.50	27.25	25.90
2500-11W-L	25.00	29.75	28.40
2500-12W-L	27.50	32.25	30.90

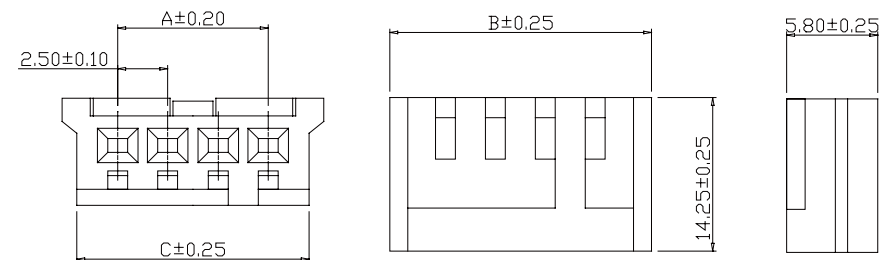

PartNo.:2500H-XXW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2500H-XXW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	