PAGE	301

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0

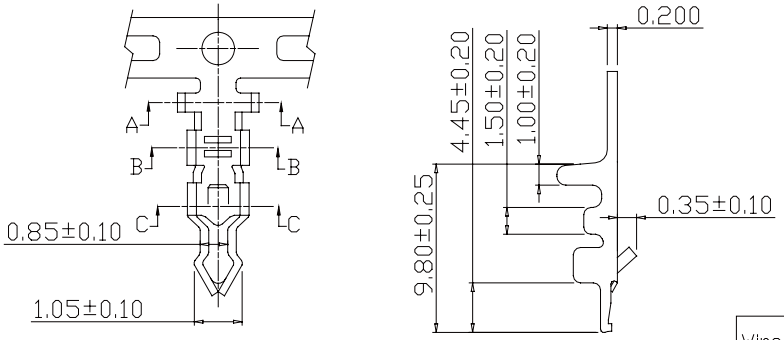

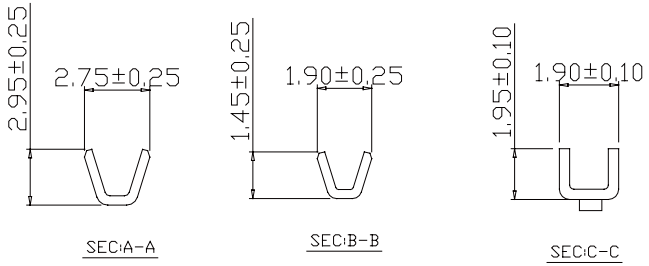

Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#22-#28	1.70mm(max)	Brass	Tin-plated	10,000pcs

PartNo.:2501-T-L

SPECIFICATIONS
Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25℃ ~ +85℃
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0
Color: Natural(White)

PART NO.	Dimensions	
	A	B
2501H-02W-L	2.50	6.50
2501H-03W-L	5.00	9.00
2501H-04W-L	7.50	11.50
2501H-05W-L	10.00	14.00
2501H-06W-L	12.50	16.50
2501H-07W-L	15.00	19.00
2501H-08W-L	17.50	21.50
2501H-09W-L	20.00	24.00
2501H-10W-L	22.50	26.50
2501H-11W-L	25.00	29.00
2501H-12W-L	27.50	31.50
2501H-13W-L	30.00	34.00
2501H-14W-L	32.50	36.50
2501H-15W-L	35.00	39.00
2501H-16W-L	37.50	41.50

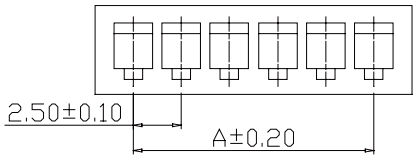



P.C.B LAYOUT





PartNo.:2501H-XXW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2501H-XXW-L			DESCRIPTION
			ITEM NO.				
			DRAW NO.				
			UNIT	mm	SCALE	no	
			TOLER		NO.		

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com