

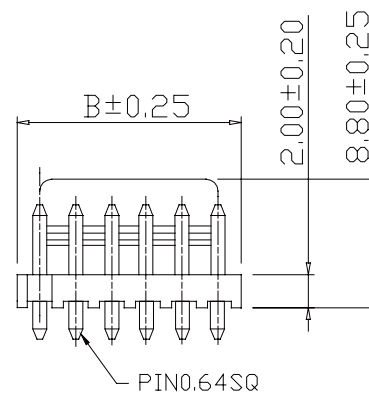


PAGE	303	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0


SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: $10\text{m}\Omega$ Max
 Insulation Resistance: $1000\text{m}\Omega$ Min
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-2
 Pantone Color: 7501C

PART NO.	Dimensions	
	A	B
2502S-02TW-L	2.50	5.00
2502S-03TW-L	5.00	7.50
2502S-04TW-L	7.50	10.00
2502S-05TW-L	10.00	12.50
2502S-06TW-L	12.50	15.00
2502S-07TW-L	15.00	17.50
2502S-08TW-L	17.50	20.00
2502S-09TW-L	20.00	22.50
2502S-10TW-L	22.50	25.00
2502S-11TW-L	25.00	27.50
2502S-12TW-L	27.50	30.00
2502S-13TW-L	30.00	32.50
2502S-14TW-L	32.50	35.00
2502S-15TW-L	35.00	37.50
2502S-16TW-L	37.50	40.00
2502S-17TW-L	40.00	42.50
2502S-18TW-L	42.50	45.00
2502S-19TW-L	45.00	47.50
2502S-20TW-L	47.50	50.00

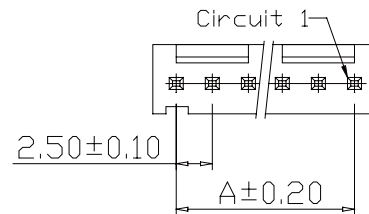

P.C.B LAYOUT

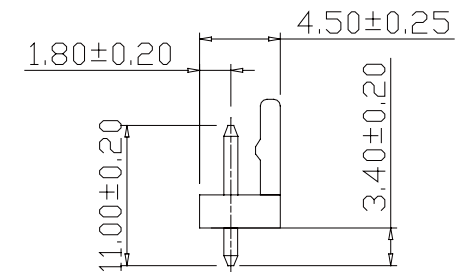

PartNo.: 2502S-XXTW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2502S-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	