

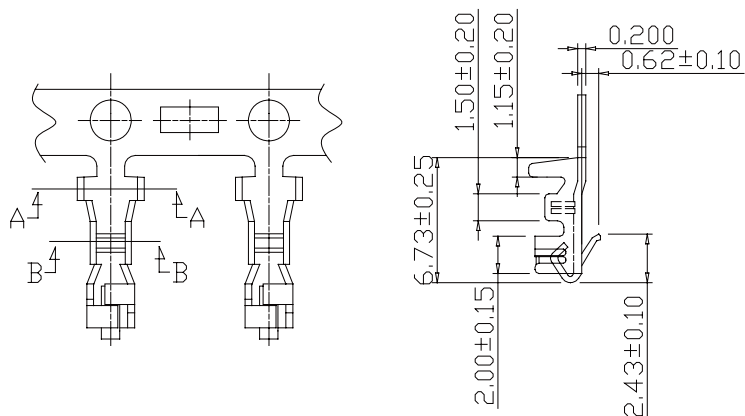


SEC:A-A



SEC:B-B





Part No	Wire Range	Insulation O.D	Material	Finish	Qty/reel
2503-TB-L	AWG#22-#28	1.90mm(max)	Brass	Tin-plated	8,000pcs
2503-TB-L	AWG#22-#28	1.90mm(max)	Phosphor Bronze	Tin-Plated	8,000pcs

PartNo.: 2503-T-L


SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0
 Color: Natural(White)

PART NO.	Dimensions	
	A	B
2503H-02W-L	2.50	5.70
2503H-03W-L	5.00	8.20
2503H-04W-L	7.50	10.70
2503H-05W-L	10.00	13.20
2503H-06W-L	12.50	15.70
2503H-07W-L	15.00	18.20
2503H-08W-L	17.50	20.70
2503H-09W-L	20.00	23.20
2503H-10W-L	22.50	25.70
2503H-11W-L	25.00	28.20
2503H-12W-L	27.50	30.70
2503H-13W-L	30.00	33.20
2503H-14W-L	32.50	35.70
2503H-15W-L	35.00	38.20
2503H-16W-L	37.50	40.70
2503H-17W-L	40.00	43.20
2503H-18W-L	42.50	45.70
2503H-19W-L	45.00	48.20
2503H-20W-L	47.50	50.70



Circuit 1



PartNo.: 2503H-XXW-L

APPRO

CHECK

DRAWN

PART NO.

Part No.:2503H-XXW-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION

Tel:0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com