

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000mΩ Min




Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin-plated


Material: Nylon 66, UL94V-0

Color: Natural(White)

PART NO.	Dimensions	
	A	B
2503R-02TW-L	2.50	7.50
2503R-03TW-L	5.00	10.00
2503R-04TW-L	7.50	12.50
2503R-05TW-L	10.00	15.00
2503R-06TW-L	12.50	17.50
2503R-07TW-L	15.00	20.00
2503R-08TW-L	17.50	22.50
2503R-09TW-L	20.00	25.00
2503R-10TW-L	22.50	27.50
2503R-11TW-L	25.00	30.00
2503R-12TW-L	27.50	32.50
2503R-13TW-L	30.00	35.00
2503R-14TW-L	32.50	37.50
2503R-15TW-L	35.00	40.00
2503R-16TW-L	37.50	42.50
2503R-17TW-L	40.00	45.00
2503R-18TW-L	42.50	47.50
2503R-19TW-L	45.00	50.00
2503R-20TW-L	47.50	52.50

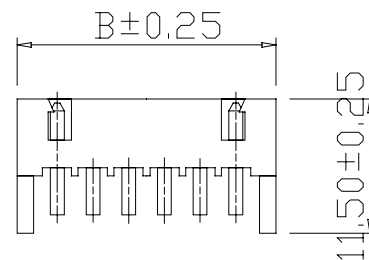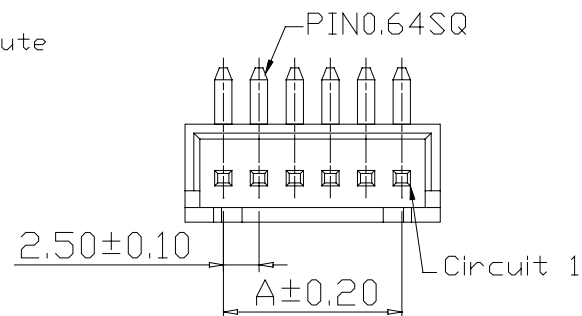

P.C.B LAYOUT

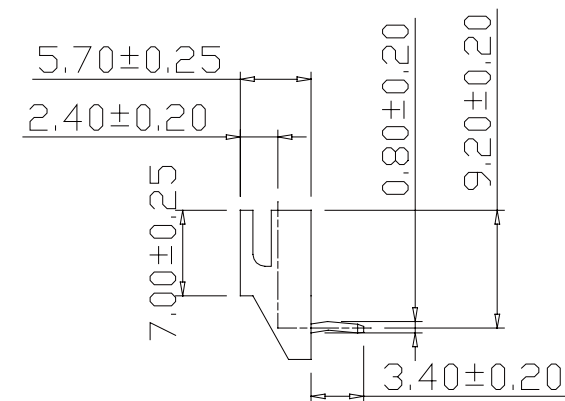

PartNo.: 2503R-XXTW-L

APPRO

CHECK

DRAWN

PART NO.

Part No.:2503R-XXTW-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com