
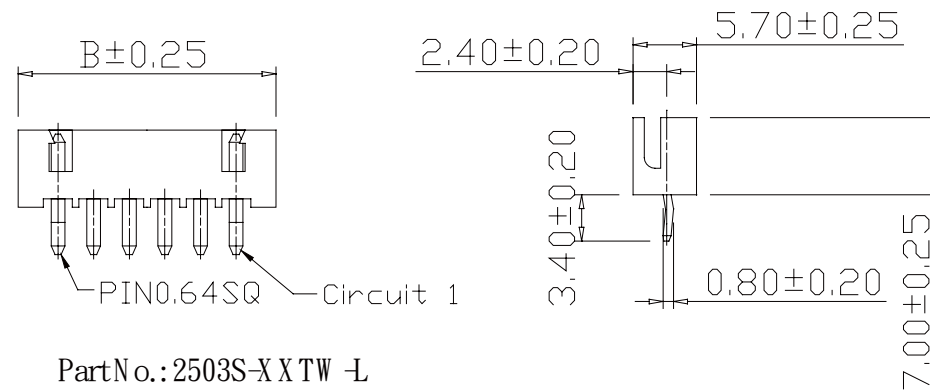


PAGE	305	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0
Color: Natural(White)

PART NO.	Dimensions	
	A	B
2503S-02TW-L	2.50	7.50
2503S-03TW-L	5.00	10.00
2503S-04TW-L	7.50	12.50
2503S-05TW-L	10.00	15.00
2503S-06TW-L	12.50	17.50
2503S-07TW-L	15.00	20.00
2503S-08TW-L	17.50	22.50
2503S-09TW-L	20.00	25.00
2503S-10TW-L	22.50	27.50
2503S-11TW-L	25.00	30.00
2503S-12TW-L	27.50	32.50
2503S-13TW-L	30.00	35.00
2503S-14TW-L	32.50	37.50
2503S-15TW-L	35.00	40.00
2503S-16TW-L	37.50	42.50
2503S-17TW-L	40.00	45.00
2503S-18TW-L	42.50	47.50
2503S-19TW-L	45.00	50.00
2503S-20TW-L	47.50	52.50

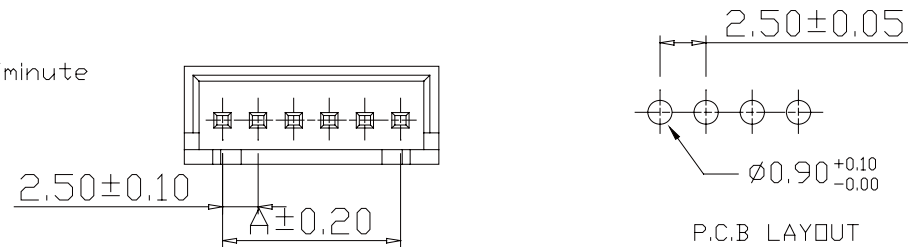

PartNo.:2503S-XXTW -L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2503S-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	