

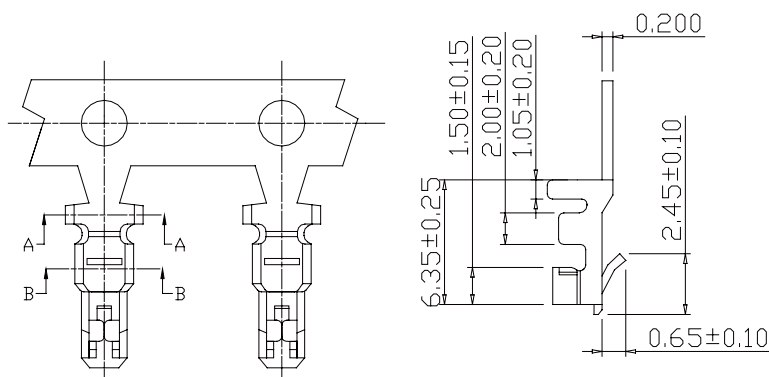


SEC:A-A



SEC:B-B

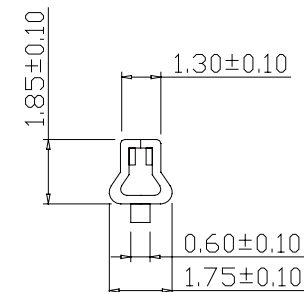







Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#22-#28	1.70mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

PartNo.: 2504-T-L

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 500V AC,DC
 Temperature Range: -25℃ ~ +85℃
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66, UL94V-0
 Pantone Color: 153C

PART NO.	Dimensions	
	A	B
2504H-02R-L	2.50	5.50
2504H-03R-L	5.00	8.00
2504H-04R-L	7.50	10.50
2504H-05R-L	10.00	13.00
2504H-06R-L	12.50	15.50
2504H-07R-L	15.00	18.00
2504H-08R-L	17.50	20.50
2504H-09R-L	20.00	23.00
2504H-10R-L	22.50	25.50
2504H-11R-L	25.00	28.00
2504H-12R-L	27.50	30.50
2504H-13R-L	30.00	33.00
2504H-14R-L	32.50	35.50
2504H-15R-L	35.00	38.00



PartNo.: 2504H-XXR-L

APPRO

CHECK

DRAWN

PART NO.

Part No.:2504H-XXR-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com