

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 30mΩ Max



Insulation Resistance: 1000mΩ Min

Withstanding Voltage: 650V AC/minute



Pin Material: Brass/Tin-plated

Material: Nylon 6T, UL94V-0

Color: Natural(Black)

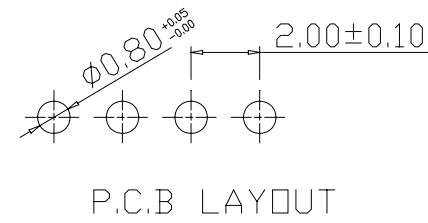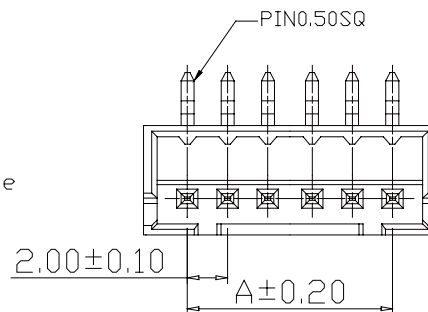

PART NO.	Dimensions	
	A	B
2003R-02TB-L	2.00	6.00
2003R-03TB-L	4.00	8.00
2003R-04TB-L	6.00	10.00
2003R-05TB-L	8.00	12.00
2003R-06TB-L	10.00	14.00
2003R-07TB-L	12.00	16.00
2003R-08TB-L	14.00	18.00
2003R-09TB-L	16.00	20.00
2003R-10TB-L	18.00	22.00
2003R-11TB-L	20.00	24.00
2003R-12TB-L	22.00	26.00
2003R-13TB-L	24.00	28.00
2003R-14TB-L	26.00	30.00
2003R-15TB-L	28.00	32.00

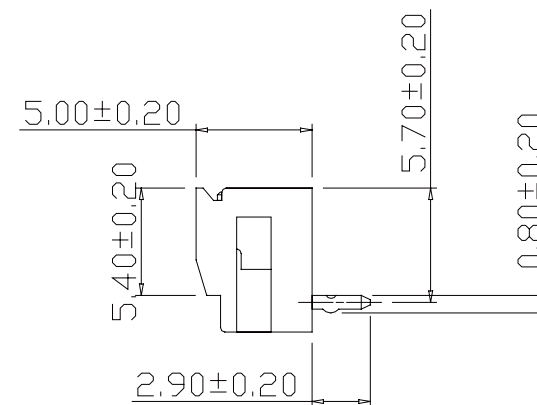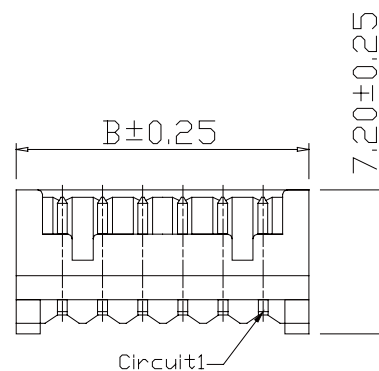

PartNo.: 2003R-XXTB-L

APPRO

CHECK

DRAWN

PART NO.

Part No.:2003R-XXTB-L

DESCRIPTION

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

Tel: 0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com