


PAGE	307	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0

SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 500V AC,DC
 Temperature Range: -25℃ ~ +85℃
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0
 Pantone Color: 153C

PART NO.	Dimensions	
	A	B
2504S-02TR-L	2.50	5.00
2504S-03TR-L	5.00	7.50
2504S-04TR-L	7.50	10.00
2504S-05TR-L	10.00	12.50
2504S-06TR-L	12.50	15.00
2504S-07TR-L	15.00	17.50
2504S-08TR-L	17.50	20.00
2504S-09TR-L	20.00	22.50
2504S-10TR-L	22.50	25.00
2504S-11TR-L	25.00	27.50
2504S-12TR-L	27.50	30.00
2504S-13TR-L	30.00	32.50
2504S-14TR-L	32.50	35.00
2504S-15TR-L	35.00	37.50

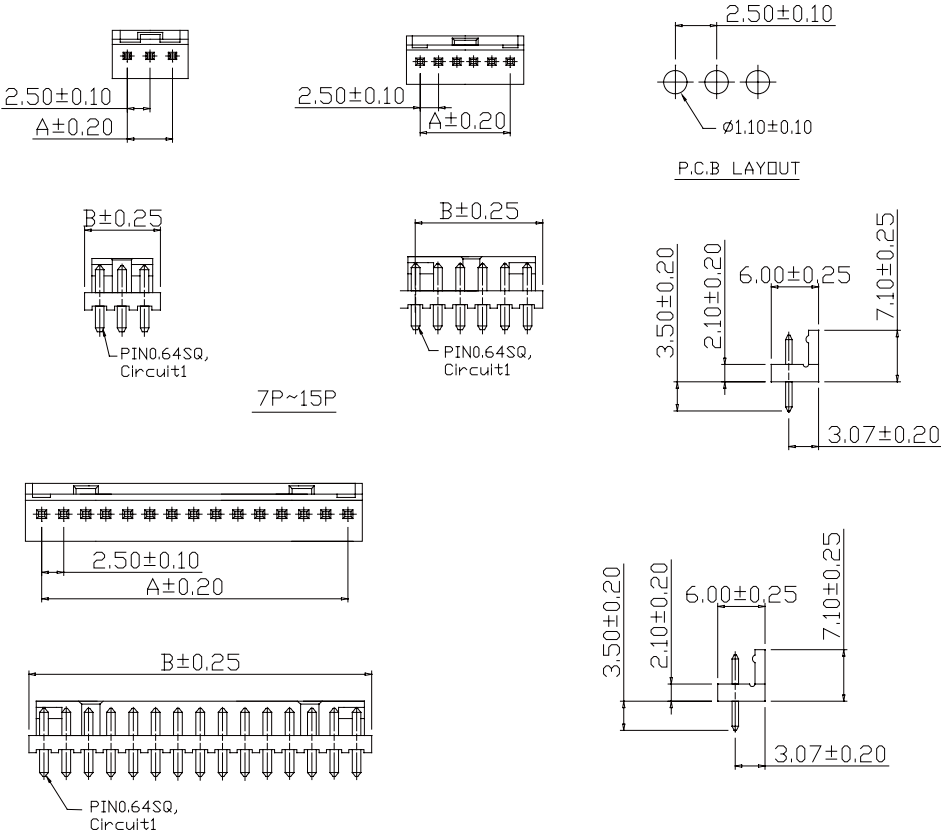

PartNo.: 2504S-XXTR-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2504S-XXTR-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
				Tel: 0769 22020068 Fax: 0769 22020069			E-mail: sales@vigortec.com	