
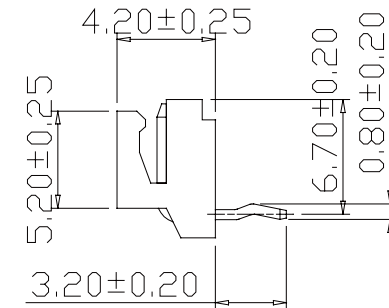



PAGE	309	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0
 Color: Natural(White)

PART NO.	Dimensions	
	A	B
2505R-02TW-L	2.50	7.50
2505R-03TW-L	5.00	10.00
2505R-04TW-L	7.50	12.50
2505R-05TW-L	10.00	15.00
2505R-06TW-L	12.50	17.50
2505R-07TW-L	15.00	20.00
2505R-08TW-L	17.50	22.50
2505R-09TW-L	20.00	25.00
2505R-10TW-L	22.50	27.50
2505R-11TW-L	25.00	30.00
2505R-12TW-L	27.50	32.50
2505R-13TW-L	30.00	35.00
2505R-14TW-L	32.50	37.50
2505R-15TW-L	35.00	40.00

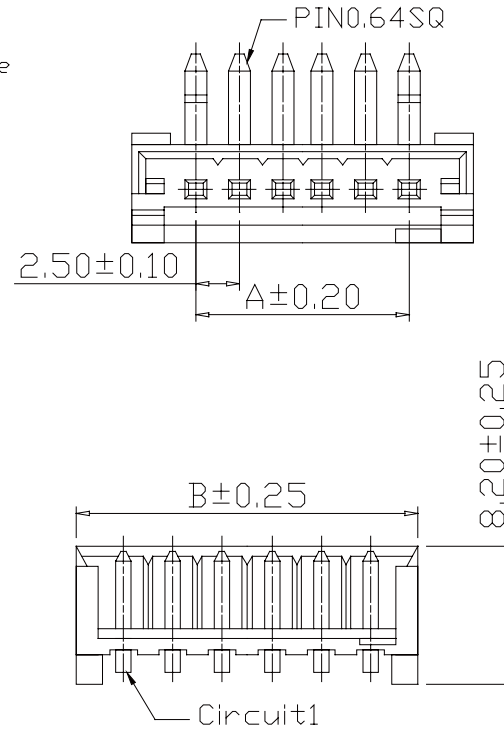

PartNo.: 2505R-XXTW -L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2505R-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	