

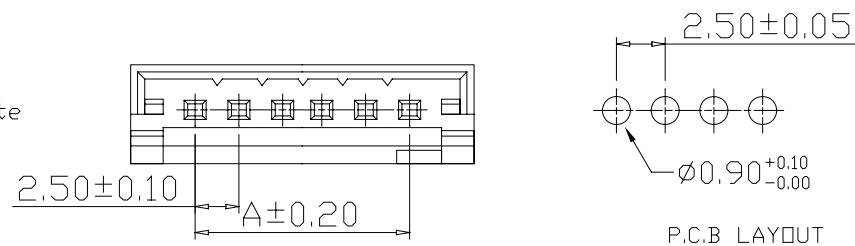


SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0
Color: Natural(White)

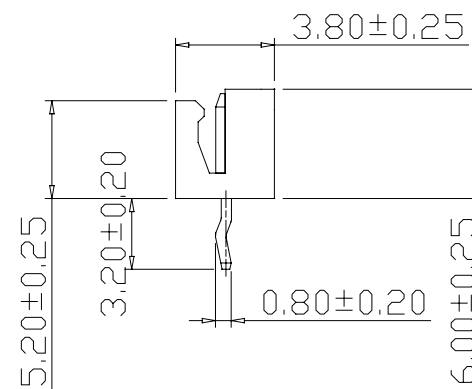

PART NO.	Dimensions	
	A	B
2505S-02TW-L	2.50	7.50
2505S-03TW-L	5.00	10.00
2505S-04TW-L	7.50	12.50
2505S-05TW-L	10.00	15.00
2505S-06TW-L	12.50	17.50
2505S-07TW-L	15.00	20.00
2505S-08TW-L	17.50	22.50
2505S-09TW-L	20.00	25.00
2505S-10TW-L	22.50	27.50
2505S-11TW-L	25.00	30.00
2505S-12TW-L	27.50	32.50
2505S-13TW-L	30.00	35.00
2505S-14TW-L	32.50	37.50
2505S-15TW-L	35.00	40.00

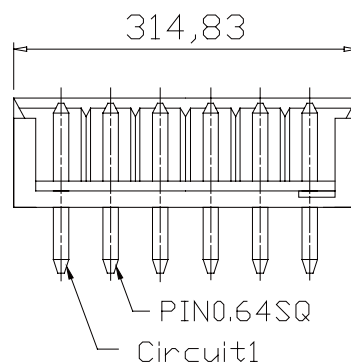

PartNo.: 2505S-XXTW -L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2505S-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	