
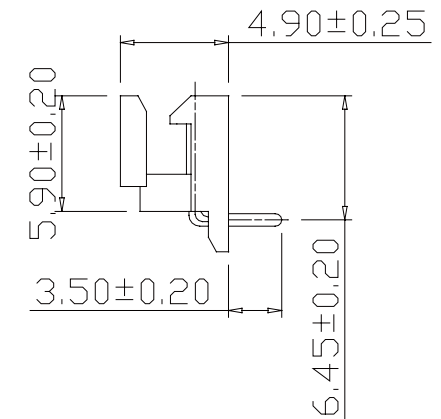
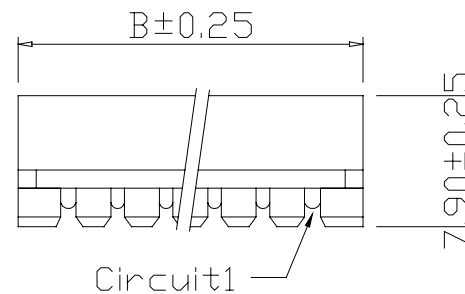



PAGE	311	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1 0

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0
Pantone Color: 7506C

PART NO.	Dimensions	
	A	B
2506R-02TW-L	2.50	7.50
2506R-03TW-L	5.00	10.00
2506R-04TW-L	7.50	12.50
2506R-05TW-L	10.00	15.00
2506R-06TW-L	12.50	17.50
2506R-07TW-L	15.00	20.00
2506R-08TW-L	17.50	22.50
2506R-09TW-L	20.00	25.00
2506R-10TW-L	22.50	27.50
2506R-11TW-L	25.00	30.00
2506R-12TW-L	27.50	32.50
2506R-13TW-L	30.00	35.00
2506R-14TW-L	32.50	37.50
2506R-15TW-L	35.00	40.00
2506R-16TW-L	37.50	42.50

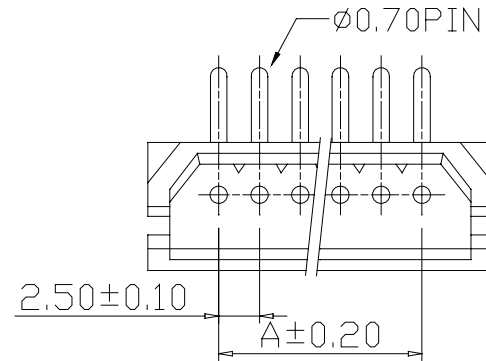

PartNo.: 2506R-XXTW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2506R-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	