BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,7	1.0

SPECIFICATION
Current Rate: 3 AMP
Insulation Resistance: 1000mΩMin
Contact Resistance: 30mΩMax
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -55℃to +105℃

MATERIAL
Insulator: Polyester,UL94v-0
◎Standard: P.B.T
Contact Pin: Brass

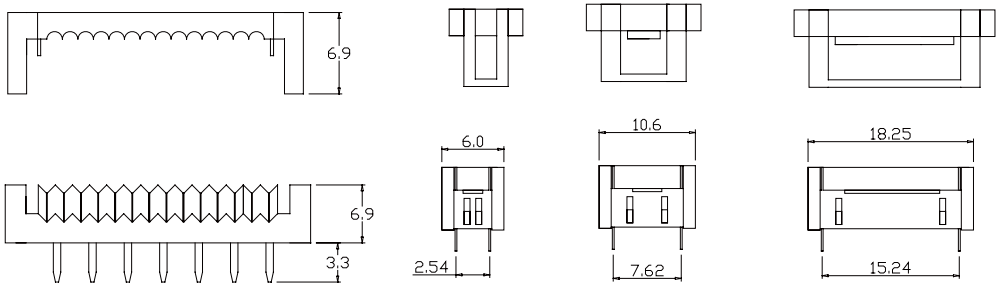

0.1″×0.1″ 0.1″×0.3″ 0.1″×0.6″

Mate flat cable 1.27mm

POSITION	A	B	
10	17.76	10.16	0.1″= 2.54
14	22.84	15.24	
16	25.38	17.78	
20	30.46	22.86	
26	38.08	30.48	
30	43.16	35.56	
34	48.24	40.64	
40	55.86	48.26	
50	68.56	60.96	
60	81.26	73.66	
POSITION	A	B	
8	15.44	7.62	0.3″= 7.62
10	17.98	10.16	
14	23.06	15.24	
16	25.60	17.78	
18	28.14	20.32	
20	30.68	22.86	
24	35.76	27.94	
28	40.84	33.02	
40	56.08	48.26	
POSITION	A	B	
24	35.76	27.94	0.6″= 15.24
28	40.84	33.02	
32	45.92	38.10	
36	51.00	43.18	
40	56.08	48.26	



0.1″×0.1″



0.1″×0.3″



0.1″×0.6″



0.1″×0.1″ Recommend P.C.B. Layout



0.1″×0.3″ Recommend P.C.B. Layout



0.1″×0.6″ Recommend P.C.B. Layout

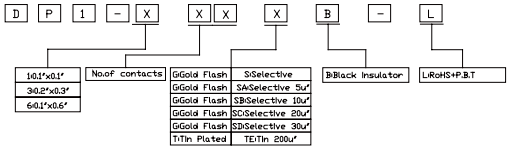

APPRO	CHECK	DRAWN	PART NO.	DP1-XXXXB-L			DESCRIPTION
			ITEM NO.				
			DRAW NO.				
			UNIT	mm	SCALE	no	
			TOLER		NO.		

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com