




PAGE	206	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,7	1.0

SPECIFICATION

Current Rate: 1 AMP
Insulation Resistance: 100mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40℃ to +105℃



MATERIAL

Insulator: Polyester,UL94v-0
Standard: Nylon 46
Contact Pin: Phosphor Bronze

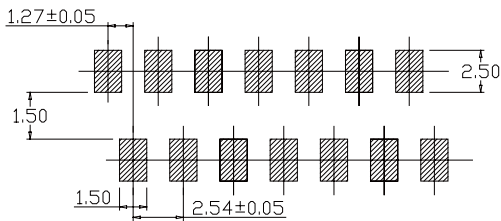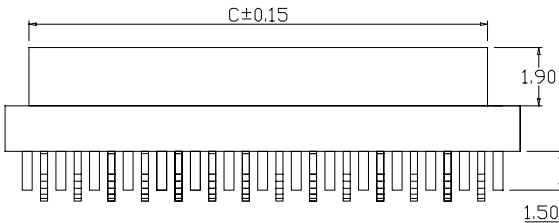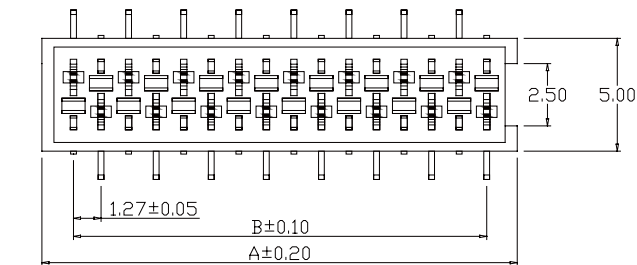

Recommended PCB Layout
(PCB TOLERANCE±0.05)

Contacts	Dimensions		
	A	B	C
4	7.00	3.81	5.60
6	9.54	6.35	8.14
8	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92



APPRO	CHECK	DRAWN	PART NO.	MIMM-XXTR-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	