

SPECIFICATION

Current Rate: 1 AMP

Insulation Resistance: 1000m Ω MinContact Resistance: 30m Ω Max

Dielectric voltage: 500V AC for one minute




Operation Temperature: -55°C to +105°C

MATERIAL




Insulator: Polyester, UL94v-0

Standard: P.B.T

Contact Pin: Brass

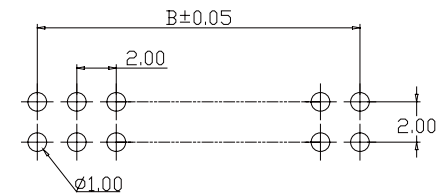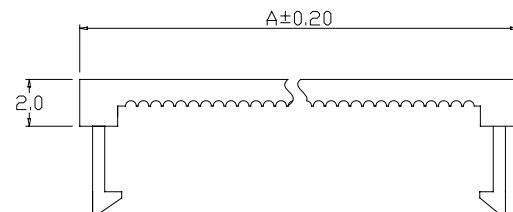

Recommend P.C.B. Layout

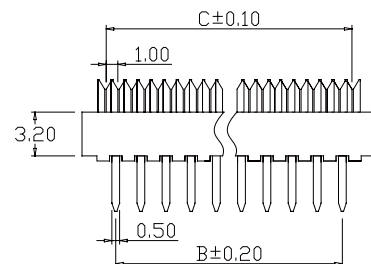

Mate flat cable 1.0 mm

No. of Contacts	Dim. A	Dim B	Dim C
8	12.10	6.00	7.00
10	14.10	8.00	9.00
12	16.10	10.00	11.00
14	18.10	12.00	13.00
16	20.10	14.00	15.00
18	22.10	16.00	17.00
20	24.10	18.00	19.00
22	26.10	20.00	21.00
24	28.10	22.00	23.00
26	30.10	24.00	25.00
28	32.10	26.00	27.00
30	34.10	28.00	29.00
32	36.10	30.00	31.00
34	38.10	32.00	33.00

No. of Contacts	Dim. A	Dim B	Dim C
36	40.10	34.00	35.00
38	42.10	36.00	37.00
40	44.10	38.00	39.00
42	46.10	40.00	41.00
44	48.10	42.00	43.00
46	50.10	44.00	45.00
48	52.10	46.00	47.00
50	54.10	48.00	49.00
52	56.10	50.00	51.00
54	58.10	52.00	53.00
56	60.10	54.00	55.00
58	62.10	56.00	57.00
60	64.10	58.0	59.00

D	P	2	-	X	X	T	B	-	L
No. of contacts			TiTin Plated			BiBlack Insulator		L:RoHS+P.B.T	

DP2-XXTB-L

DESCRIPTION



DRAW NO.

UNIT

TOLER

mm

SCALE

no

NO.

Tel: 0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com