





PAGE	197	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,7	1.0

SPECIFICATION

Current Rate: 0.5 AMP
Insulation Resistance: 1000mΩ Min
Contact Resistance: 30mΩ Max
Dielectric voltage: 300V AC for one minute
Operation Temperature: -55°C to +105°C




MATERIAL

Insulator: Polyester,UL94v-0
Standard: P.B.T
Contact Pin: Brass

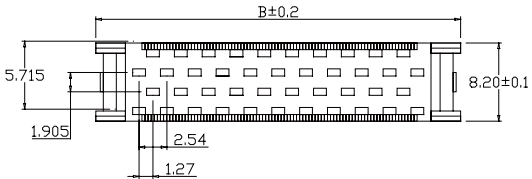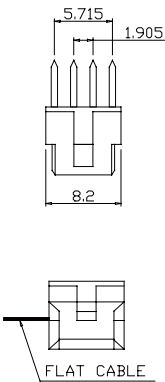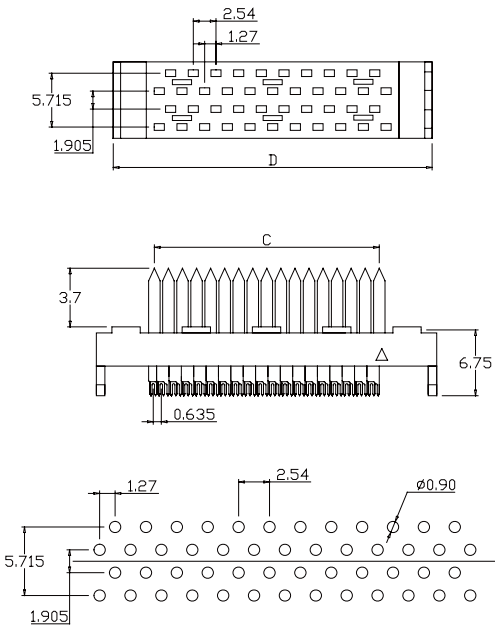

Mate flat cable 0.635 mm

POSITION	A	B	C	D
26	22.61	24.61	15.24	24.61
30	25.15	27.15	17.76	27.15
34	27.69	29.69	20.32	29.69
40	31.42	33.50	24.13	33.50
50	37.85	39.85	30.48	39.85
60	44.20	48.20	36.83	48.20
68	49.20	51.40	41.91	51.40
80	56.82	59.00	49.53	59.00
100	69.60	71.60	62.23	71.60



APPRO	CHECK	DRAWN	PART NO.	DP3-XXTB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	