
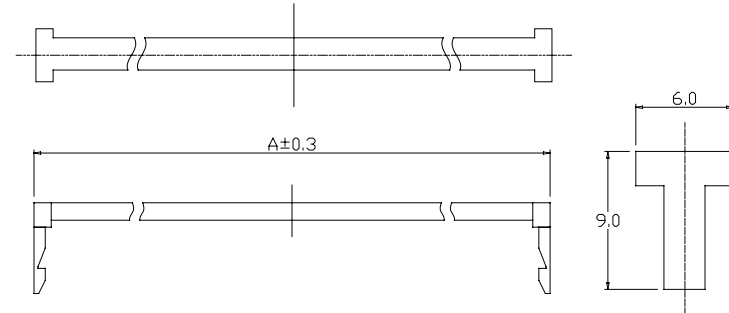
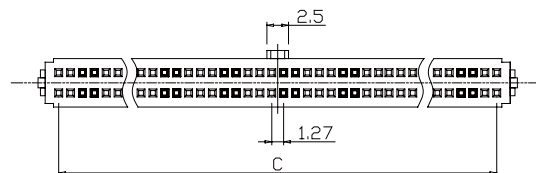
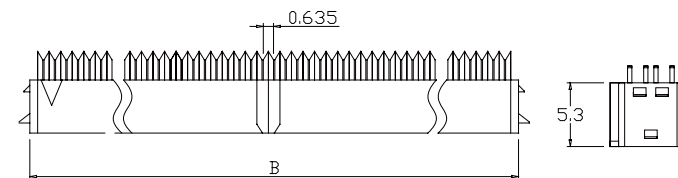
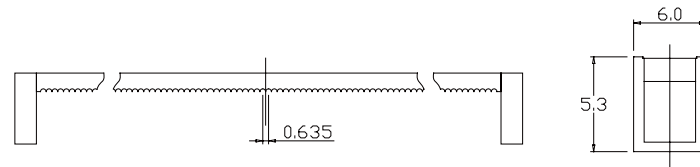


SPECIFICATION

Current Rate: 0.5 AMP
 Insulation Resistance: 500mΩMin
 Contact Resistance: 20mΩMax
 Dielectric voltage: 500V AC for one minute
 Operation Temperature: -40°C to +65°C


MATERIAL

Insulator: Polyester,UL94v-0
 ©Standard: P.B.T
 Contact Pin: Brass

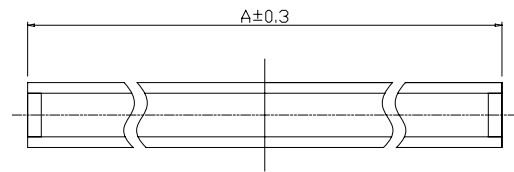

Mate flat cable 0.635 mm

Contacts	Dimensions		
	A	B	C
10	11.35	8.45	5.08
16	15.16	12.26	8.89
20	17.70	14.80	11.43
26	21.51	18.61	15.24
30	24.05	21.15	17.78
34	26.59	23.69	20.32
40	30.40	27.50	24.13
50	36.75	33.85	30.48
60	43.10	40.20	36.83
68	48.48	45.28	41.91
80	55.80	52.90	49.53
100	68.50	65.60	62.23

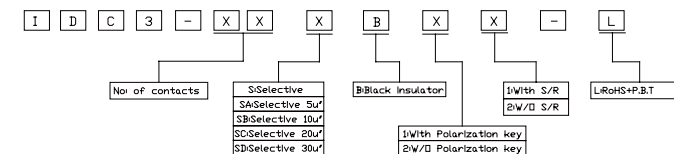

APPRO	CHECK	DRAWN	PART NO.	IDC3-XXXBXX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com								