





PAGE	200	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,7	1.0

SPECIFICATION

Current Rate: 0.5 AMP
Insulation Resistance: 500mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40°C to +65°C


MATERIAL

Insulator: Polyester, UL94v-0
Standard: P.B.T
Contact Pin: Brass

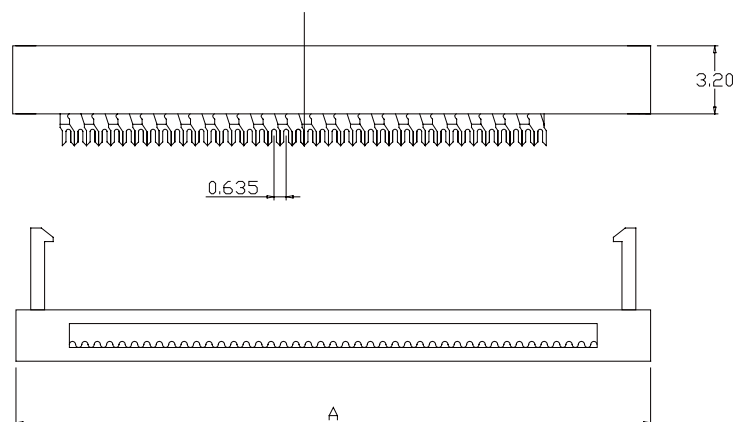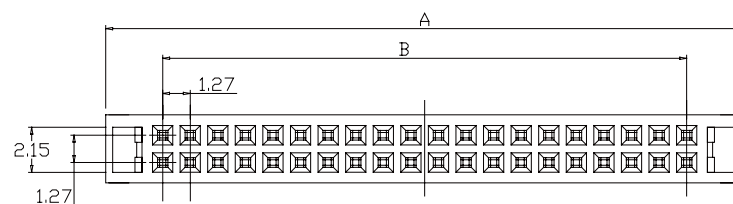

Mate flat cable 0.635 mm

Contacts	A	B	Contacts	B	C
40 PIN	29.59	24.13	10 PIN	10.54	5.08
44 PIN	32.13	26.67	12 PIN	11.81	6.35
50 PIN	35.94	30.48	20 PIN	16.89	11.43
62 PIN	42.29	36.83	26 PIN	20.78	15.24
68 PIN	43.37	41.91	30 PIN	23.24	17.78
80 PIN	54.99	49.53	34 PIN	25.78	20.32

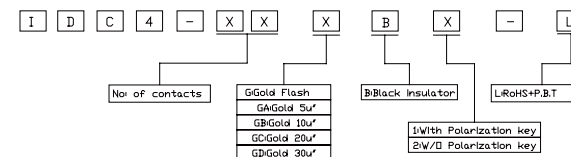

APPRO	CHECK	DRAWN	PART NO.	ITEM NO.	SCALE	no	DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	