

PAGE	204	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,7	1.0



SPECIFICATION

Current Rate: 1 AMP
Insulation Resistance: 100mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
Standard: Nylon 46
Contact Pin: Phosphor Bronze

Contacts	Dimensions	
	A	B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86

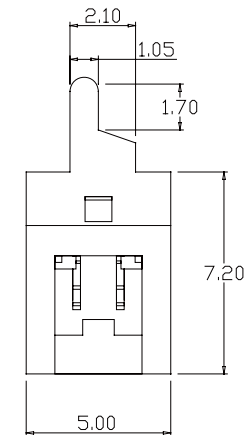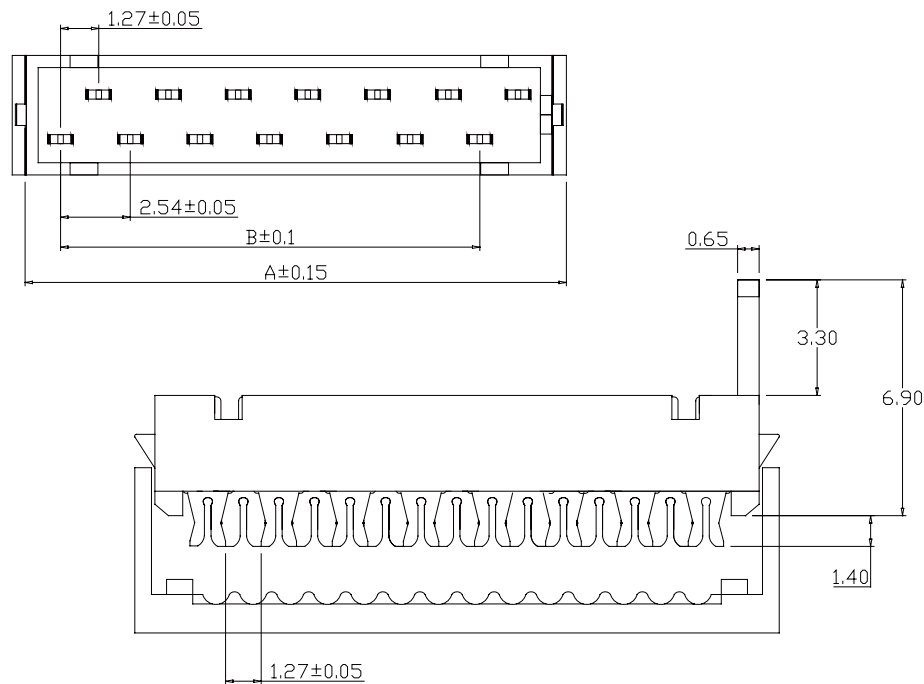

M	I	B	P	I	3	-	X	X	T	R	-	U
						Noi of contacts		TiTin Plated		RiRed Insulator		UIRoHS+Nylon 46

APPRO	CHECK	DRAWN	ITEM NO.	MIBPI3-XXTR-U	DESCRIPTION			
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	