| PAGE | 25 |
|---|---|

| BY | CHK | REVISION RECORD MODIFICATIONS | DATE | REV. |
|---|---|---|---|---|
| ALLEN | | RELEASE TO PRODUCTION | 2007,9,12 | 1.0 |

**SPECIFICATION**
Current Rate: 2 AMP
Insulation Resistance: 1000mΩMin
Contact Resistance: 30mΩMax
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -55℃to +105℃

**MATERIAL**
Insulator: Polyester, UL 94V-0
◎Sandard: P.B.T
Contact Pin: Brass

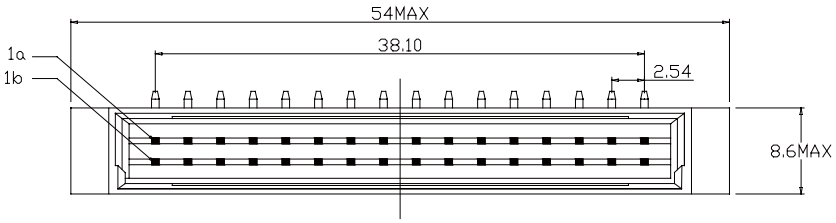





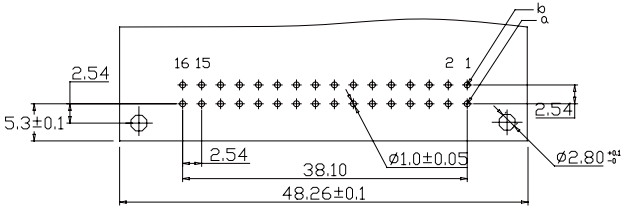


RECOMMENDED P.C.BOARD LAYOUT

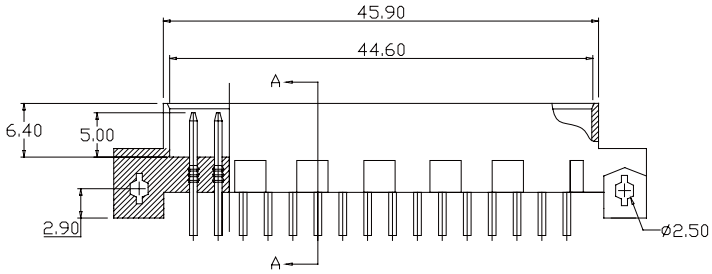





D I N S R – M 2 X X X X X W X – L

- S:Short body
- R:Right Angle
- 2:2 rows
- 1:Pitch 2.54mm
- 2:Pitch 5.08mm
- No. of contacts
- S:Selective
- SF:Selective 15u"
- SD:Selective 30u"
- Wilvory Insulator
- 1:W/O Boardlock
- 2:With Boardlock
- L:RoHS+P.B.T

ORDERING INFORMATION

| MUMBER OF CONTACTS | ROWS/SOSITIONS WITH CONTACT | | PITCH |
|---|---|---|---|
| 32 | a+b | 123456 | 2.54mm |
| 16 | a | 123456 | |
| 16 | a+b ALL EVEN NO. | 123456 | 5.08mm HALF-LOADED |

| APPRO | CHECK | DRAWN | PART NO. | DINSR-M2XXXXWX-L | | | DESCRIPTION |
|---|---|---|---|---|---|---|---|
| | | | ITEM NO. | | | | |
| | | | DRAW NO. | | | | |
| | | | UNIT | mm | SCALE | no | |
| | | | TOLER | | NO. | | |

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com