






PAGE	17	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,12	1.0

SPECIFICATION

Current Rate: 2 AMP
Insulation Resistance: 1000m Ω Min
Contact Resistance: 30m Ω Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -55°C to +105°C

MATERIAL


Insulator: Polyester, UL 94V-0
Standard: P.B.T
Contact Pin: Brass

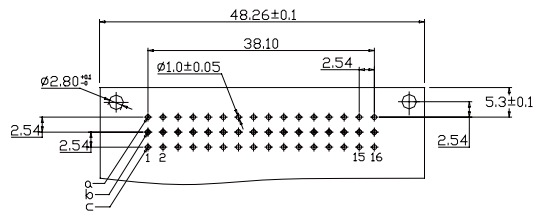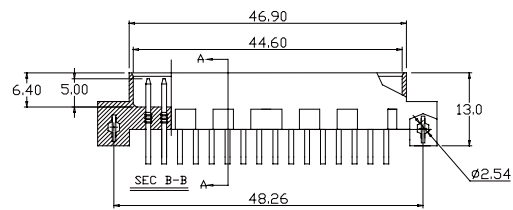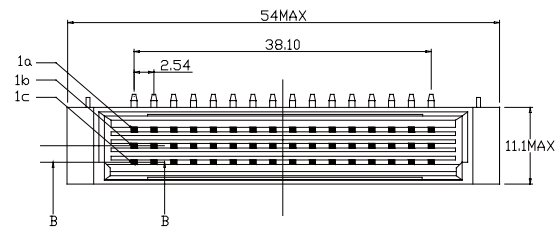

RECOMMENDED P.C. BOARD LAYOUT

ORDERING INFORMATION

NUMBER OF CONTACTS	ROWS/POSITIONS WITH CONTACT	PITCH
48	a+b	2.54mm
32A	a	
32B	a+b ALL EVEN NO.	
16	a+b	5.08mm HALF-LOADED
24	a	
16	a+b ALL EVEN NO.	

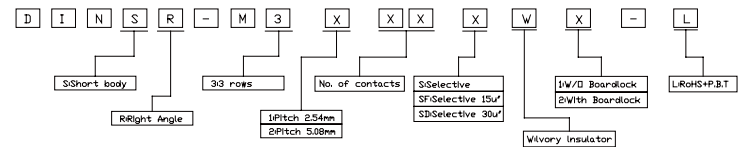

APPRO	CHECK	DRAWN	PART NO.	DINSR-M3XXXXWX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	