

SPECIFICATION

Current Rate: 2 AMP

Insulation Resistance: 1000mΩ Min

Contact Resistance: 30mΩ Max

Dielectric voltage: 1000V AC for one minute






Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: Polyester, UL 94V-0

Standard: P.B.T


Contact Pin: Phosphor Bronze

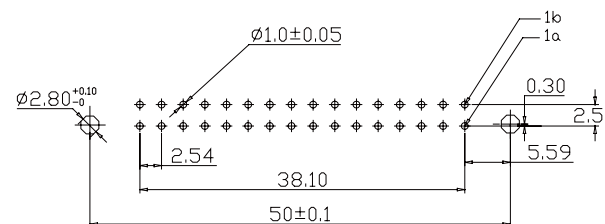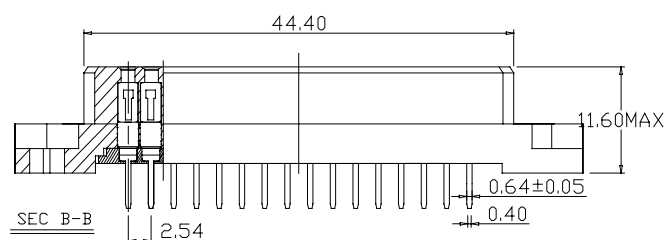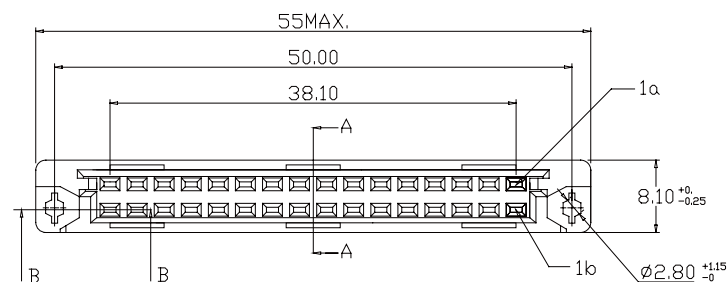

RECOMMENDED P.C. BOARD LAYOUT

ORDERING INFORMATION

NUMBER OF CONTACTS	ROWS/POSITIONS WITH CONTACT	PITCH
32	a+b	2.54mm
16	a	2.54mm
16	a+b ALL EVEN NO.	5.08mm HALF-LOADED

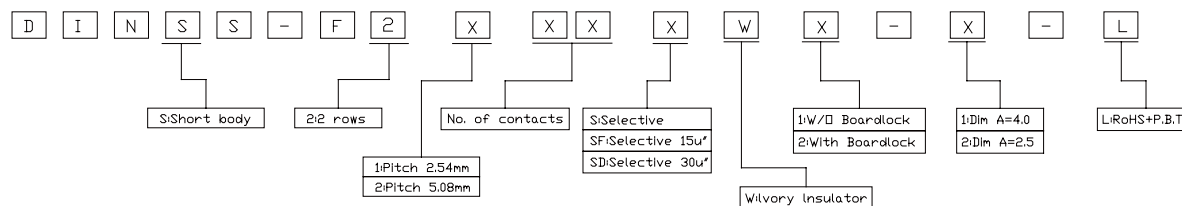

APPRO

CHECK

DRAWN

PART NO.

DINSS-F2XXXXWX-X-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com