PAGE	21

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,12	1.0

SPECIFICATION
Current Rate: 2 AMP
Insulation Resistance: 1000mΩMin
Contact Resistance: 30mΩMax
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -55℃to +105℃

MATERIAL
Insulator: Polyester, UL 94V-0
◎Sandard: P.B.T
Contact Pin: Brass

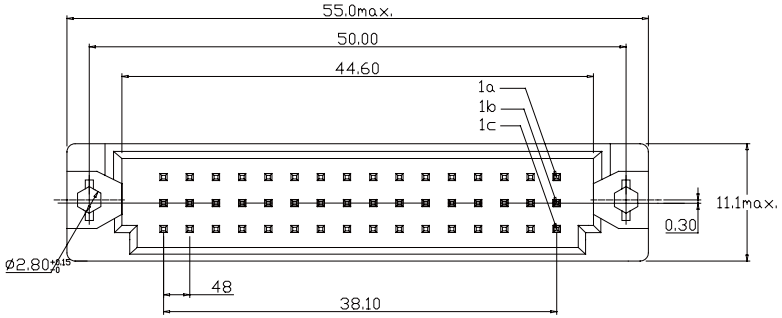



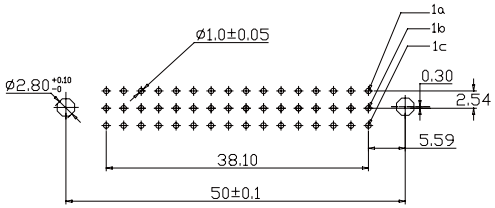

RECOMMENDED P.C.BOARD LAYOUT

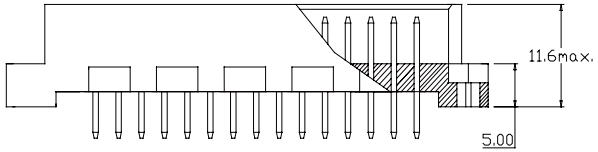



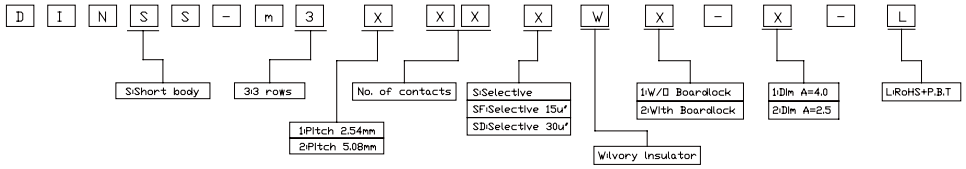

ORDERING INFORMATION

MUMBER OF CONTACTS	ROWS/SOSITIONS WITH CONTACT		PITCH
48	a+b		2.54mm
32A	a		
32B	a+b ALL EVEN NO.		
16	a+b		
24	a		5.08mm HALF-LOADED
16	a+b ALL EVEN NO.		

APPRO	CHECK	DRAWN	PART NO.	DINSS-M3XXXXWX-X-L			DESCRIPTION
			ITEM NO.				
			DRAW NO.				
			UNIT	mm	SCALE	no	
			TOLER		NO.		

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com