


SPECIFICATION


Current Rate: 2 AMP
 Insulation Resistance: 1000mΩ Min
 Contact Resistance: 30mΩ Max
 Dielectric voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL






Insulator: Polyester, UL 94V-0
 Standard: P.B.T
 Contact Pin: Phosphor Bronze

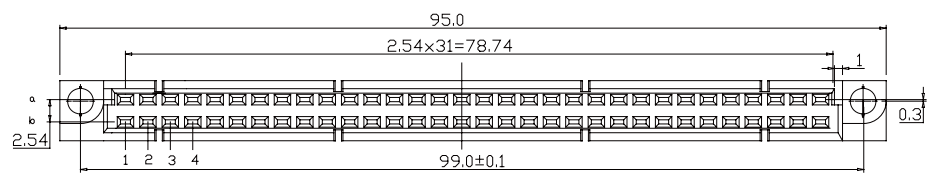

DINLI-F264

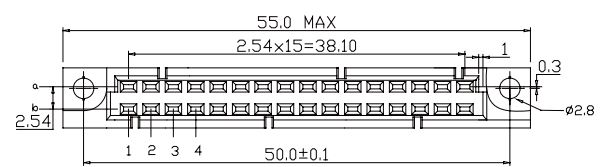

DINLI-F264

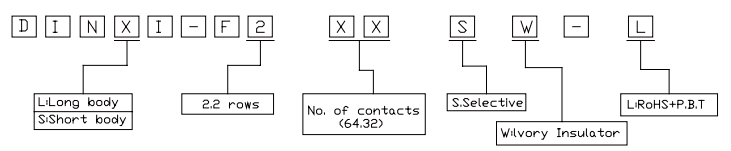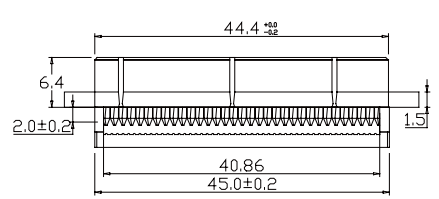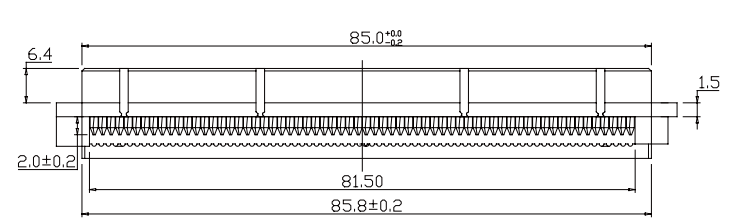

APPRO	CHECK	DRAWN	PART NO.	DINXI-F2XXSW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	