

SPECIFICATION

Current Rate: 2 AMP

Insulation Resistance: 1000m Ω MinContact Resistance: 30m Ω Max

Dielectric voltage: 1000V AC for one minute


Operation Temperature: -55°C to +105°C

MATERIAL


Insulator: Polyester, UL 94V-0

Standard: P.B.T






Contact Pin: Phosphor Bronze

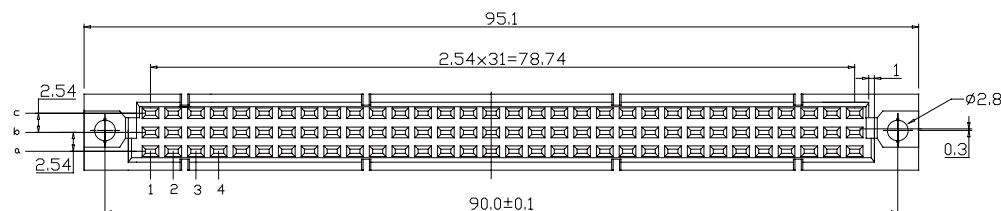

DINLI-F364

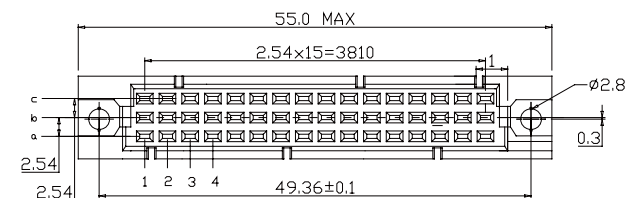

DINLI-F364

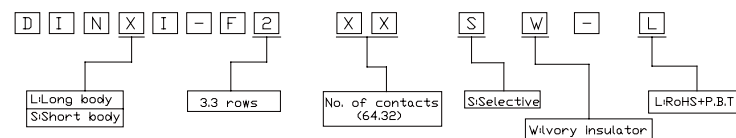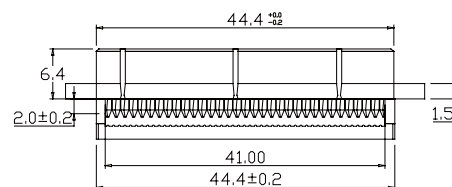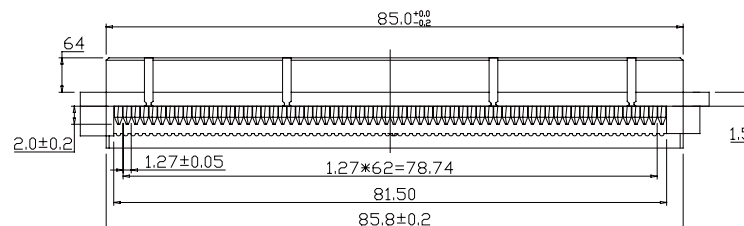

APPRO

CHECK

DRAWN

PART NO.

DINXI-F3XXSW-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION

Tel: 0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com