BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,12	1.0

SPECIFICATION
Current Rate: 2 AMP
Insulation Resistance: 1000mΩMin
Contact Resistance: 30mΩMax
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -55℃to +105℃

MATERIAL
Insulator: Polyester, UL 94V-0
◎Standard: P.B.T
Contact Pin: Brass

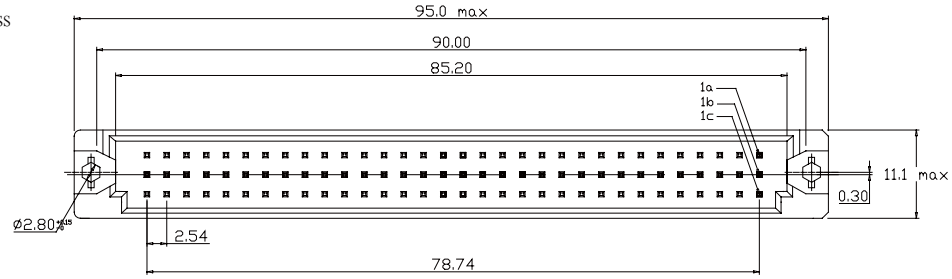



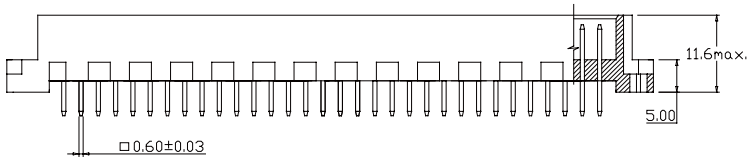



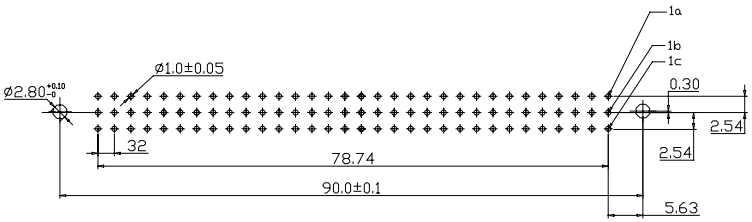

RECOMMENDED P.C.BOARD LAYOUT

D I N L S - M 3 X X X X W X - X - L

- L:Long body
- 3:3 rows
- 1:Pitch 2.54mm / 2:Pitch 5.08mm
- No. of contacts
- S:Selective / SF:Selective 15u" / SD:Selective 30u"
- W:Ivory Insulator
- 1:W/O Boardlock / 2:With Boardlock
- 1:Dim A=4.0 / 2:Dim A=2.5
- L:RoHS+P.B.T

ORDERING INFORMATION

MUMBER OF CONTACTS	ROWS/SOSITIONS WITH CONTACT		PITCH
96	a+b		2.54mm
64A	a		
64B	a+b ALL EVEN NO.		
32	a+b		
48	a		5.08mm HALF-LOADED
32	a+b ALL EVEN NO.		

APPRO	CHECK	DRAWN	PART NO.	DINLS-M3XXXXWX-X-L			DESCRIPTION
			ITEM NO.				
			DRAW NO.				
			UNIT	mm	SCALE	no	
			TOLER		NO.		

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com