




BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,12	1.0

SPECIFICATION


Current Rate: 2 AMP
 Insulation Resistance: 1000mΩMin
 Contact Resistance: 30mΩMax
 Dielectric voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL



Insulator: Polyester, UL 94V-0
 Standard: P.B.T
 Contact Pin: Phosphor Bronze

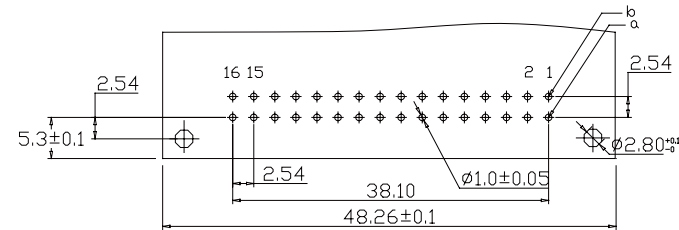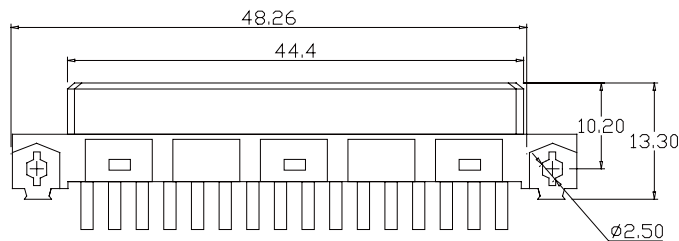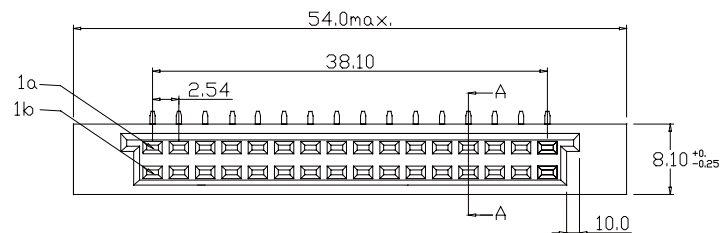

RECOMMENDED P.C. BOARD LAYOUT



SEC A-A

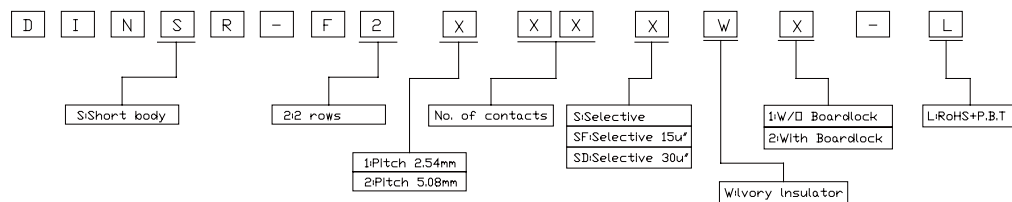

ORDERING INFORMATION

NUMBER OF CONTACTS	ROWS/SDITIONS WITH CONTACT	PITCH
32	a+b	2.54mm
16	a	2.54mm
16	a+b ALL EVEN NO.	5.08mm HALF-LOADED

APPRO	CHECK	DRAWN	PART NO.	DESCRIPTION	
			ITEM NO.		
			DRAW NO.		
			UNIT	mm SCALE no	
			TOLER	NO.	
			DINSR-F2XXXXWX-L		
			Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		