







BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,12	1.0

SPECIFICATION

Current Rate: 2 AMP
 Insulation Resistance: 1000mΩ Min
 Contact Resistance: 30mΩ Max
 Dielectric voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C


MATERIAL

Insulator: Polyester, UL 94V-0
 Standard: P.B.T
 Contact Pin: Phosphor Bronze

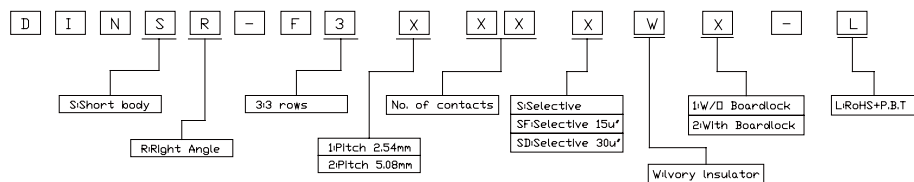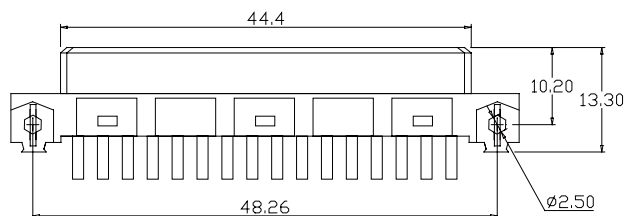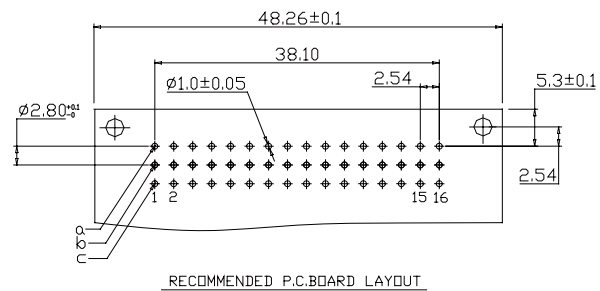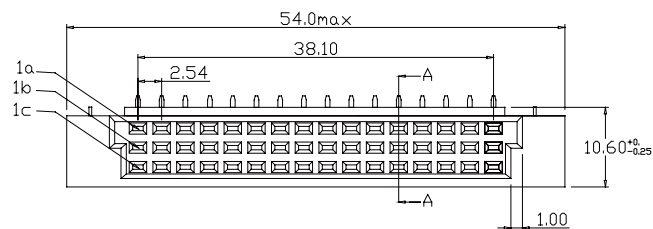

ORDERING INFORMATION

NUMBER OF CONTACTS	ROWS/POSITIONS WITH CONTACT	PITCH
48	a+b	2.54mm
32A	a	
32B	a+b ALL EVEN NO.	
16	a+b	
24	a	5.08mm HALF-LOADED
16	a+b ALL EVEN NO.	

APPRO	CHECK	DRAWN	PART NO.	DINSR-F3XXXXWX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER	NO.				
Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com								