

SPECIFICATION


Current Rate: 0.5 AMP
Insulation Resistance: 50mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 250V AC for one minute
Operation Temperature: -20℃ to +85℃

MATERIAL



Insulator: Polyester,UL94v-0
Standard: Nylon 46
Contact Pin: Phosphor Bronze
Finish: Tin Plated



Upper Contact




Bottom Contact

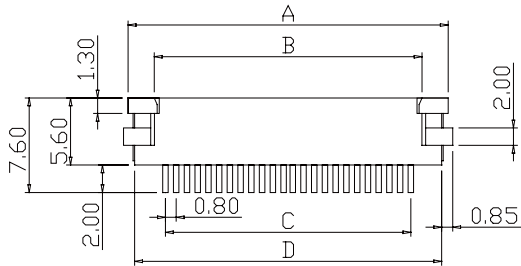

Upper Contact



Bottom Contact

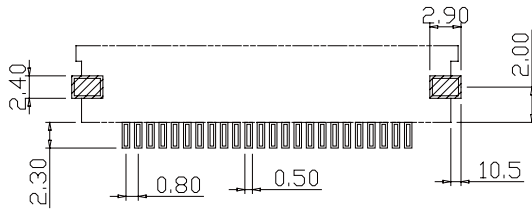

Recommended PCB Layout
(PCB TOLERANCE±0.05)

pos.	Dimensions			
	A	B	C	D
04	9.50	4.84	2.40	8.20
05	10.30	5.64	3.20	9.00
06	11.10	6.44	4.00	9.80
07	11.90	7.24	4.80	10.60
08	12.70	8.04	5.60	11.40
09	13.50	8.84	6.40	12.20
10	14.30	9.64	7.20	13.00
11	15.10	10.44	8.00	13.80
12	15.90	11.24	8.80	14.60
13	16.70	12.04	9.60	15.40
14	17.50	12.84	10.40	16.20
15	18.30	13.64	11.20	17.00
16	19.10	14.44	12.00	17.80
17	19.90	15.24	12.80	18.60
18	20.70	16.04	13.60	19.40
19	21.50	16.84	14.40	20.20
20	22.30	17.64	15.20	21.00
21	23.10	18.44	16.00	21.80
22	23.90	19.24	16.80	22.60
23	24.70	20.04	17.60	23.40
24	25.50	20.84	18.40	24.20
25	26.30	21.64	19.20	25.00
26	27.10	22.44	20.00	25.80
27	27.90	23.24	20.80	26.00
28	28.70	24.04	21.60	27.40
29	29.50	24.84	22.40	28.20
30	30.30	25.64	23.20	29.00
31	31.10	26.44	24.00	29.80
32	31.90	27.24	24.80	30.60
33	32.70	28.04	25.60	31.40
34	33.50	28.84	26.40	32.20
35	34.30	29.64	27.20	33.00

