

SPECIFICATION

Current Rate: 0.5 AMP

Insulation Resistance: 50mΩ Min

Contact Resistance: 20mΩ Max

Dielectric voltage: 250V AC for one minute

Operation Temperature: -20°C to +85°C


MATERIAL

Insulator: Polyester, UL94v-0


Standard: Nylon 46

Contact Pin: Phosphor Bronze




Finish: Tin Plated

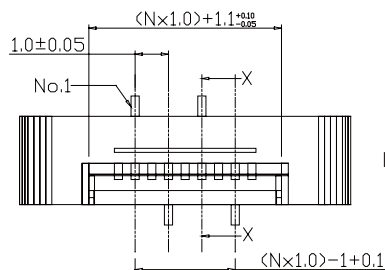


B TYPE

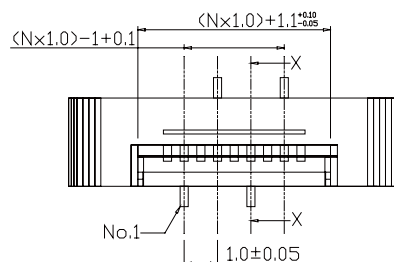


A TYPE

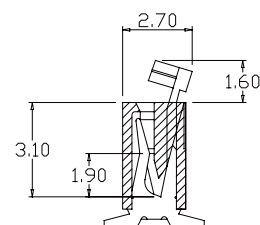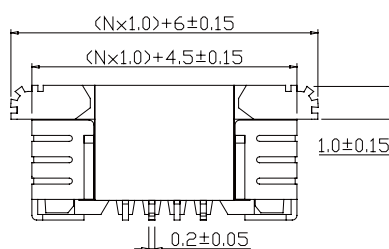


SECT X-X

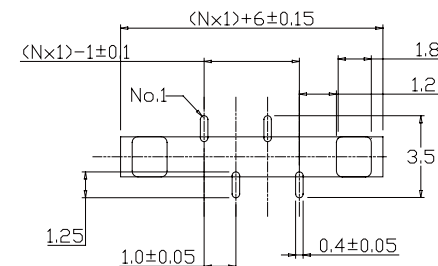

B TYPE

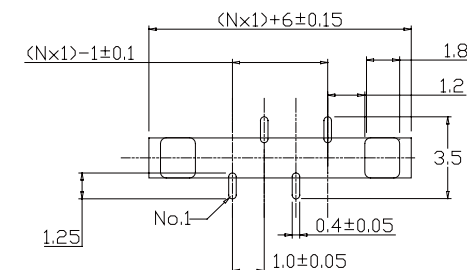

A TYPE

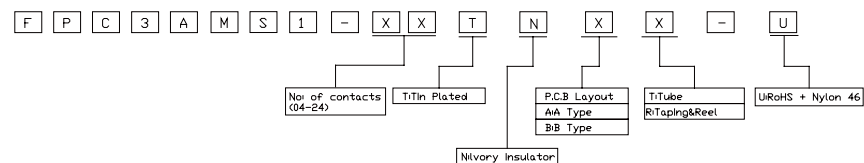Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

APPRO

CHECK

DRAWN

PART NO.

FPC3AMS1-XXTNXX-U

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION

Tel: 0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com