

SPECIFICATION

Current Rate: 0.5 AMP

Insulation Resistance: 50mΩ Min

Contact Resistance: 20mΩ Max

Dielectric voltage: 250V AC for one minute

Operation Temperature: -20°C to +85°C




MATERIAL

Insulator: Polyester,UL94v-0


©Standard: Nylon 46

Contact Pin: Phosphor Bronze




Finish: Tin Plated

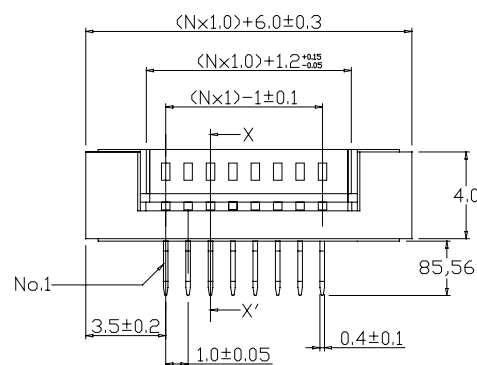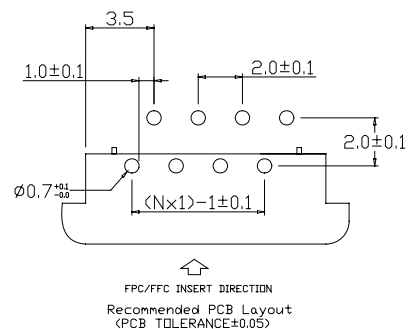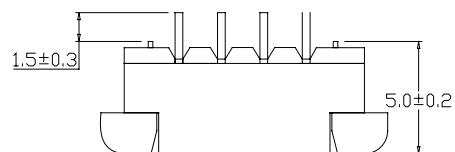


UPPER CONTACT TYPE

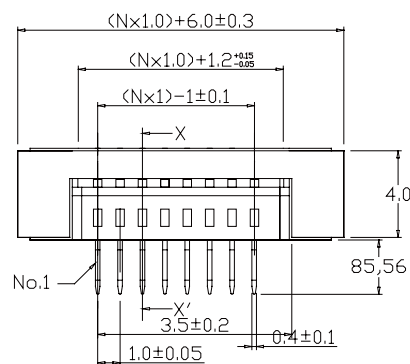

BOTTOM CONTACT TYPE

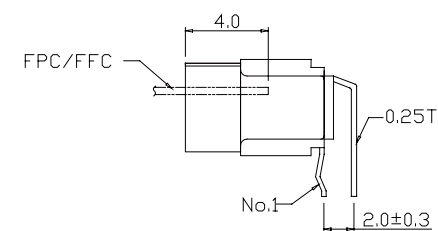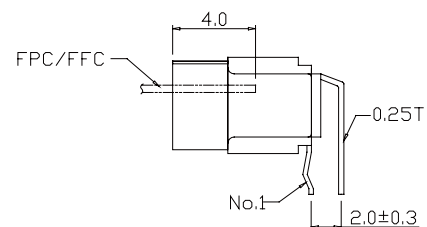

SECT. X-X'




SECT. X-X'

F P C 3 A R 1 - X X T N X - U

No. of contacts (04-52) TiIn Plated Nitvory Insulator URoHS + Nylon 46

Upper Contact Bottom Contact

APPRO	CHECK	DRAWN	PART NO.	FPC3AR1-XXTNX-U			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com