
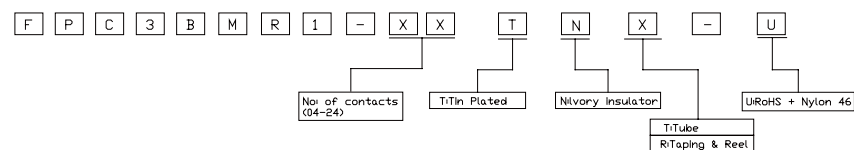

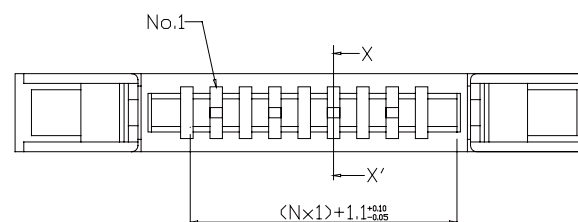

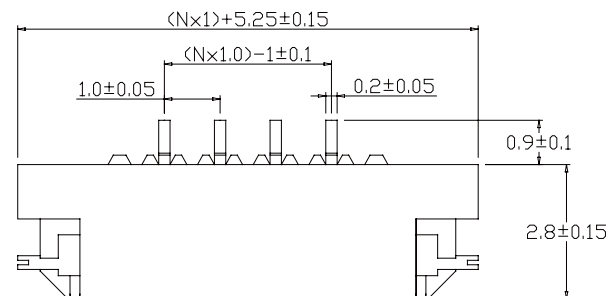


SPECIFICATION

Current Rate: 0.5 AMP
Insulation Resistance: 50mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 250V AC for one minute
Operation Temperature: -20°C to +85°C

MATERIAL

Insulator: Polyester,UL94v-0
 Standard: Nylon 46
 Contact Pin: Phosphor Bronze
 Finish: Tin Plated

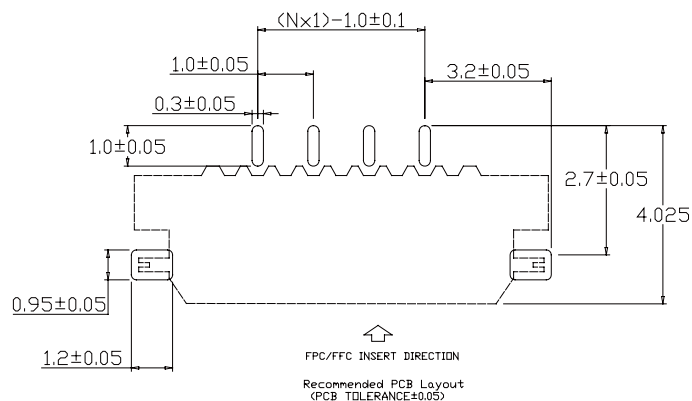

APPRO	CHECK	DRAWN	PART NO.	FPC3BMR1-XXTNX-U			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		