
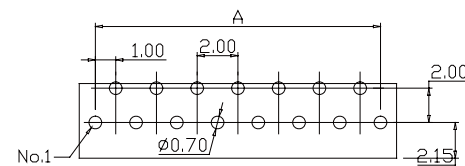

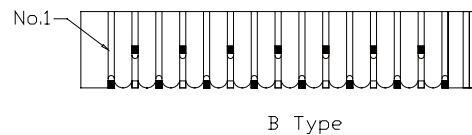
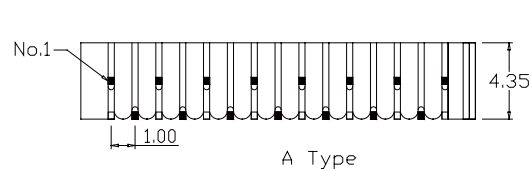


SPECIFICATION


Current Rate: 0.5 AMP
 Insulation Resistance: 50mΩ Min
 Contact Resistance: 20mΩ Max
 Dielectric voltage: 250V AC for one minute
 Operation Temperature: -20°C to +85°C

MATERIAL

Insulator: Polyester, UL94v-0
 Standard: P.B.T
 Contact Pin: Phosphor Bronze
 Finish: Tin Plated

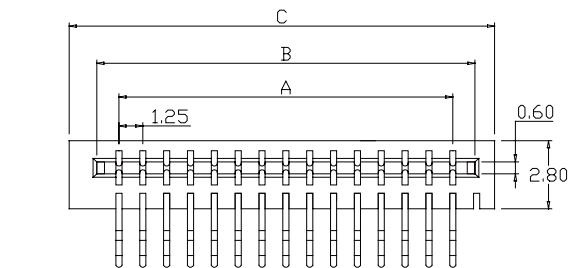


A Type

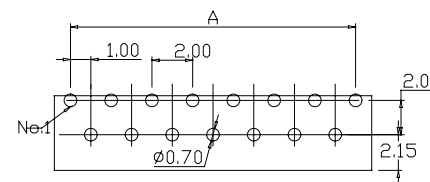


B Type

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Circuits	Dimension		
	A	B	C
02	1.00	3.1	4
03	2.00	4.1	5
04	3.00	5.1	6
05	4.00	6.1	7
06	5.00	7.1	8
07	6.00	8.1	9
08	7.00	9.1	10
09	8.00	10.1	11
10	9.00	11.1	12
11	10.00	12.1	13
12	11.00	13.1	14
13	12.00	14.1	15
14	13.00	15.1	16
15	14.00	16.1	17
16	15.00	17.1	18
17	16.00	18.1	19
18	17.00	19.1	20
19	18.00	20.1	21
20	19.00	21.1	22
21	20.00	22.1	23
22	21.00	23.1	24
23	22.00	24.1	25
24	23.00	25.1	26
25	24.00	26.1	27
26	25.00	27.1	28
27	26.00	28.1	29
28	27.00	29.1	30
29	28.00	30.1	31
30	29.00	31.1	32
31	30.00	32.1	33
32	31.00	33.1	34
33	32.00	34.1	35
34	33.00	35.1	36
35	34.00	36.1	37
36	35.00	37.1	38

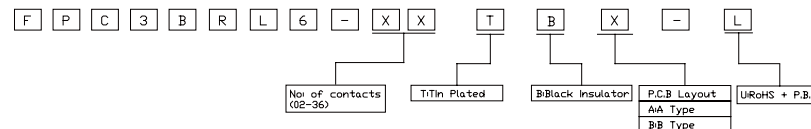

APPRO	CHECK	DRAWN	PART NO.	FPC3BRL6-XXTBX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
				Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com				