




PAGE	191	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,8	1.0

SPECIFICATION


Current Rate: 1 AMP
Insulation Resistance: 50mΩMin
Contact Resistance: 20mΩMax
Dielectric voltage: 250V AC for one minute
Operation Temperature: -20℃to +85℃

MATERIAL

Insulator: Polyester,UL94v-0
Standard: P.B.T
Contact Pin: Phosphor Bronze
Finish: Tin Plated

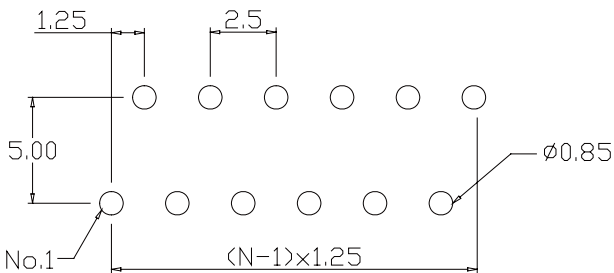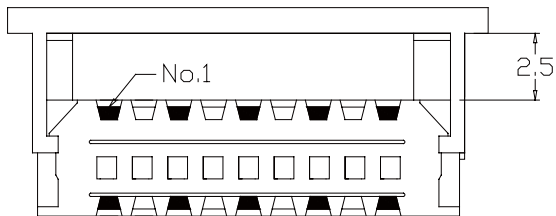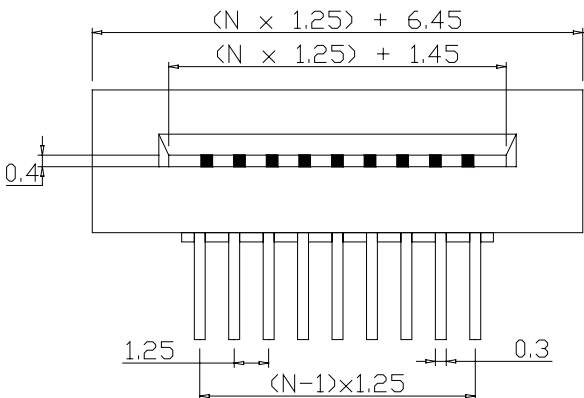

Recommended PCB Layout
(PCB TOLERANCE±0.05)

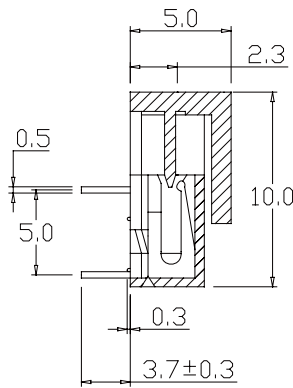

F

P

C

2

A

R

-

X

X

T

N

-

L

No. of contacts
(03~32)

TiTin Plated

Nivory Insulator

L:RoHS + P.B.T

APPRO	CHECK	DRAWN	PART NO.	FPC2AR-XXTN-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel:0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	