

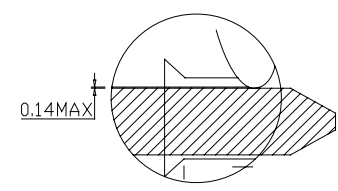


SPECIFICATION
 Current Rate: 1 AMP
 Insulation Resistance: 50mΩ Min
 Contact Resistance: 20mΩ Max
 Dielectric voltage: 250V AC for one minute
 Operation Temperature: -20°C to +85°C


MATERIAL
 Insulator: Polyester,UL94v-0
 Standard: P.B.T
 Contact Pin: Phosphor Bronze
 Finish: Tin Plated

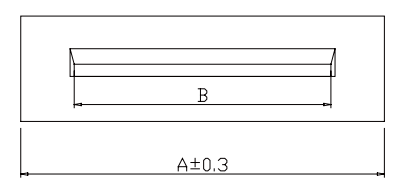

DETAIL A
CLOSE TYPE



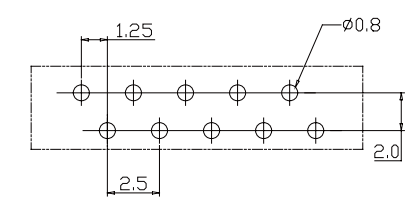


B TYPE

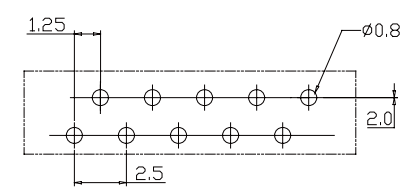

A TYPE

Recommended PCB Layout
(PCB TOLERANCE±0.05)

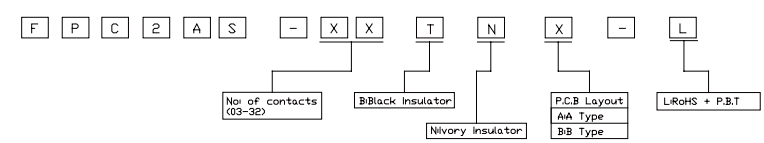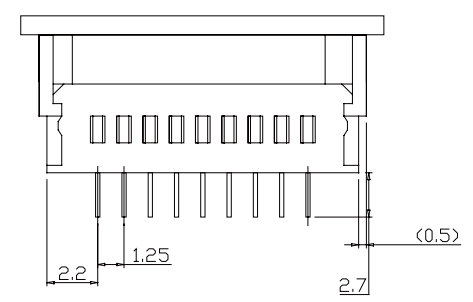

CKT	A	B	CKT	A	B
03	9.55	5.20	17	27.05	22.70
04	10.80	6.45	18	28.30	23.95
05	12.05	7.70	19	29.55	25.20
06	13.30	8.95	20	30.80	26.45
07	14.55	10.20	21	32.05	27.70
08	15.80	11.45	22	33.30	28.95
09	17.05	12.70	23	34.55	30.20
10	18.30	13.95	24	35.80	31.45
11	19.55	15.20	25	37.05	32.70
12	20.80	16.45	26	38.30	33.95
13	22.05	17.70	27	39.55	35.20
14	23.30	18.95	28	40.80	36.45
15	24.55	20.20	29	42.05	37.70
16	25.80	21.45	30	43.30	38.95
			31	44.55	40.20
			32	45.80	41.45